



LAND




SEA



AIR

HORUS430-K1

GPGPU-BASED RADAR SUBSYSTEM BY
NVIDIA QUADRO AND INTEL I7-9850HE

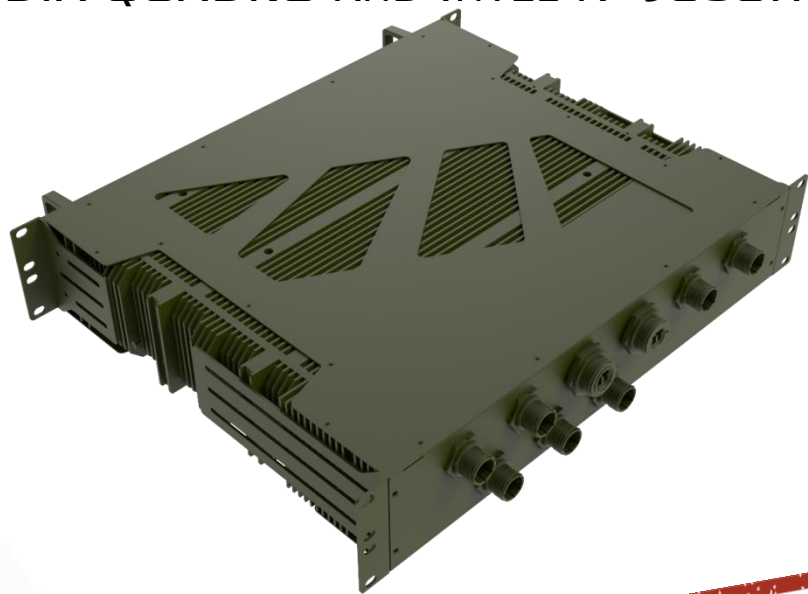

- Intel® Core™ I7-9850HE
- NVIDIA MXM Graphic Engine support up to GTX1080 (8GB-GDDR5X, CUDA 2560)
- Extreme Temperature -20~+55 degree
- MIL-STD 461/1275 EMI Filter 18V~36V
- DTL38999 Military Connector



Specifications

SYSTEM

CPU	I7-9850HE(6 Core , 4.40Ghz,FCFBGA1440)
-----	--

Memory type	2 x DDR4 up to 64GB
-------------	---------------------

DISPLAY

GPU	NVIDIA MXM Graphic Engine support up to GTX1080 (8GB-GDDR5X, CUDA 2560)
-----	---

STORAGE

HDD/SSD	2 x 2.5" Easy swap HDD/SSD Tray
---------	---------------------------------

ETHERNET

Ethernet	1x Intel® i210IT Gigabit Ethernet 1x Intel® i219LM Gigabit Ethernet
----------	--

REAR I/O

X1	USBx2~4 Amphenol TV07RW-13-35S (22PIN)
----	--

X2, X3	LAN Amphenol TV07RW-13-98S (10PIN)
--------	------------------------------------

X4, X5	10Gbe L-COM RLRJ121LC01A or RLRK121LC01A
--------	--

X6	COM (RS232) Amphenol TV07RW-13-98S(10PIN)
----	---

X7, X8	DVI Amphenol TV07RW-13-35S (22PIN)
--------	------------------------------------

FRONT I/O

Storage Device	2 x 2.5" Easy swap HDD/SSD Tray
----------------	---------------------------------

Power Button	1 x Power Button with LED backlight
--------------	-------------------------------------

Ground Screw	1 x M4 Screw
--------------	--------------

OS SUPPORT LIST

Windows	Windows 10
---------	------------

Linux	Fedora 20 、 Ubuntu 13.04 、 Ubuntu 13.10 、 Ubuntu 14.04
-------	--

MECHANICAL

Power Requirement	12V DC-IN
Dimension	450 x 483 x 88 mm (W x D x H)
Weight	10.6 KG
Ingress Protection	IP54 (IP65 Optional)
Operating Temp.	-20 to 55°C
Storage Temp.	-40°C to 85°C
Relative Humidity	5% to 95%, non-condensing

ENVIRONMENT

MIL-STD-810F Test	Operating Tests		
	Low Temperature	Method 502.4 Procedure 2	-20°C (Cold Boot) -40°C (Continue Operating)
	High Temperature	Method 501.4 Procedure 2	+55°C
	Humidity	Method 507.4	5 x 48 hour cycles
	Vibration	Method 514.5 Category 4	10—500Hz 1.04Grms
	Shock	Method 516.5	40G 11mSec TPS 3 axis
	Altitude	Method 500.5 Procedure 2	-1,000m to +12,000m
	Non-Operating Tests		
	Shock	Method 516.5	40G 11ms TPS 3 axis
	Low Temperature Storage	Method 501.4	-40°C
	High Temperature Storage	Method 502.4 Procedure 1	+75°C
	Vibration	Method 514.5 Category 24 fig 514.5C-17	20 to 1000Hz @ 0.02g ² /Hz falling @ -6dB to 2000Hz
	Altitude	Method 500.5 Procedure 2	-1,000m to +12,000m
EMC	CE, FCC compliant		
Green Product	RoHS, WEEE compliance		