



LAND



SEA



AIR

SKY12-X06

DUAL VISION MODE MILITARY DISPLAY
WITH PROGRAMMABLE FUNCTION KEYS




- Sunlight Readable up to 1300 Nits
- NVIS Support, Dimmable Backlight < 1%
- Anti-Scratch 7H (G.F.G.) Resistive Touch
- Programmable Soft Touch Function Key
- IP65 Certified
- MIL-STD 461/1275 18V~36V DC Input



Content

- 1. Introduction & Key Features**
- 2. Optional Features**
- 3. MIL-STD-1275/461**
- 4. Specification**
- 5. Dimension**
- 6. Ordering Information**

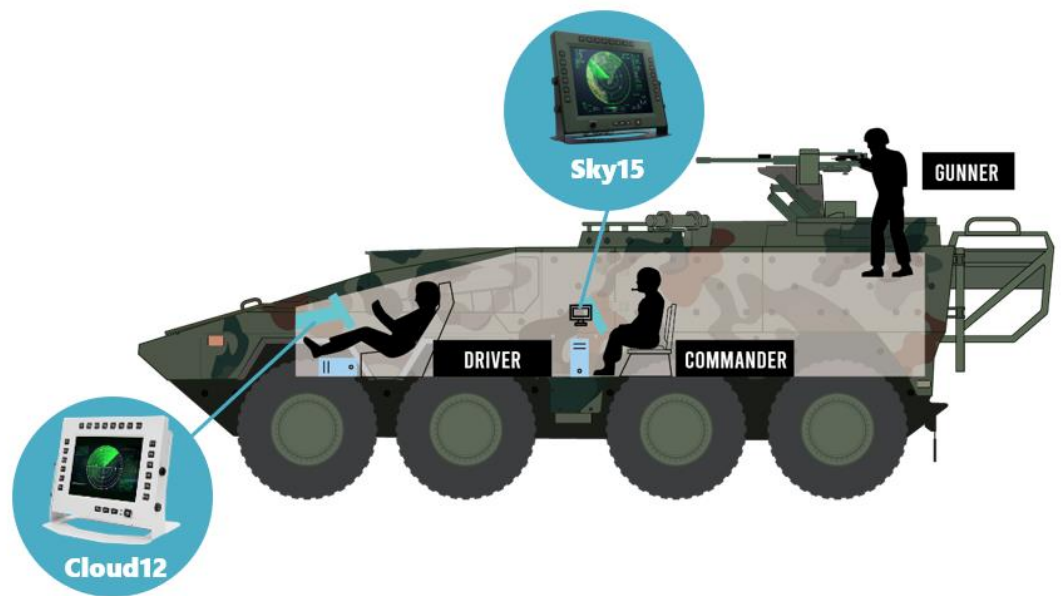

1. Introduction & Key Features

Introduction:

SKY-X06 rugged smart display which are featuring brightness up to 1300 nits and night vision image system (NVIS) under 1% nits, bonding of protective glass (GFG), touch screens, SKY-X06 also provide optional feature such as EMI filtering / EMI mesh shielding, anti-reflection/anti-glare (AR/AG) coatings depend on customized requirement. 7 soft touch button /w programmable function keys, the rugged display also designed with IP-65 waterproof and dust proof all-aluminum housings, support extended operating temperature range from -40°C to 70°C and flexibly support MIL-STD 461/1275 power input range from 18V to 36V.

Description of Key Features:

(1) Sunlight Readable Up to 1300 nits



Normal TFT Sun Readable TFT

SKY12-X06 ruggedized smart display can support sunlight-readable to meet high ambient light conditions such as direct sunlight, it also adopt our excellent optic bonding technical process, when bonded together the light passes through the bonded layers and is absorbed somewhat into the screen. Optical bonding is therefore important in making screens sunlight readable.

(2) Night Vision Mode Support

When system at night mode, the operator can adjust brightness by hard key to turn it from 1000 nits to 1.7 nits or other customized night vision mode immediately, and the display gets ready at low brightness right away once its trigger and protect the usage of night vision devices at once.



(3) MIL-DTL 38999



Amphenol®

MIL-DTL-38999 is a high-performance cylindrical connector family designed to withstand the extreme shock, exposure and vibration that are commonplace in defense and aerospace applications. Made with removable crimp or fixed hermetic solder contacts, these connectors provide high-vibration characteristics and are suitable for severe wind and moisture problem areas.

(4) G.F.G. Resistive Touch Screen

GFG touch screens are operable with fingers, pens and gloves. The glass surfaces make the glass-film-glass sensor very durable and scratch resistant (7H).



(5) Soft Touch Buttons



SKY-X06 equipped up to 3 ruggedized function keys, 3 OSD keys and 1 power button by rubber-tooling made, each key pad dimension at 16 x 16 mm even the operator access function keys with wearing MOPP levels gloves.

(6) IP65 Certified

SKY-X06 has complete resistance to dust and water; which is ruggedized and reliable for constrained military, ground army and defense.



(7) MIL-STD 810G Compliance

SKY-X06 is rigorously field-tested to meet or exceed MIL-STD810G for extremely high & low temp, humidity, shock, and vibration.




(8) MIL-461/1275 EMI Filter

SKY-X06 is designed with MIL-STD-1275/704, protecting against vehicle/aircrafts voltage surges, spikes and transients, and even electromagnetic interference. This characteristic is well suited for the strictest military requirement and deliver optimal performance in harsh conditions.



2. Optional Features


(1) Intelligent Heater



Due to consider boot up in extreme cold environment -40 degree, SKY-X06 is designed with intelligent heater to control temperature automatically.

(2) Waterproof Valve

SKY-X06 has completely waterproof to balance atmospheric pressure to meet different altitude environment.



(3) EMI Shielding Cable Kits

Electromagnetic Interference (EMI) is prevalent throughout the anywhere. The main purpose of effective EMC Shielding is to prevent electromagnetic interference (EMI) or radio frequency interference (RFI) from impacting sensitive electronics. This is achieved by using a metallic screen to absorb the electromagnetic interference that is being transmitted through the air.

The shield effect is based on a principle used in a Faraday cage – the metallic screen completely surrounds either the sensitive electronics or the transmitting electronics. The screen absorbs the transmitted signals, and causes a current within the body of the screen. This current is absorbed by a ground connection, or a virtual ground plane. By absorbing these transmitted signals before they reach the sensitive circuitry, the protected signal is kept clean of electromagnetic interference, maximizing shielding effectiveness.




Figure : EMI Shielding Cable Kit

3. MIL-STD-1275/461


To enhance reliability, SKY-X06 is designed for rugged extremes durable metal casing with an isolated MIL-STD-1275, MIL-STD 704 and DO-160 power supply in an IP50 (dustproof) ultra durable metal / aluminum chassis that protects against vehicle/aircraft voltage surges, spikes and transients is well suited for the strictest military requirement and deliver optimal performance in harsh conditions. The GAIA Hi-Rel DC/DC CONVERTER it also provides Undervoltage Lockout (UVLO), Output Over Current Protection (OCP), Output Overvoltage Protection (OVP) and Over Temperature Protection (OTP) to made robust and safe to use.



Module Compliance with MIL-STD-461C/D/E Standards

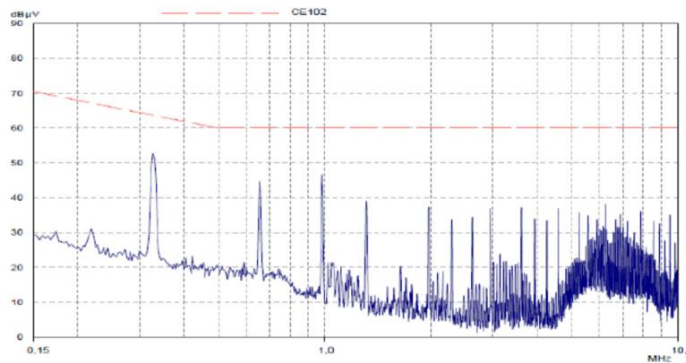

MIL-STD-461E : MGDS-15x-H-J with FGDS-10A-50V

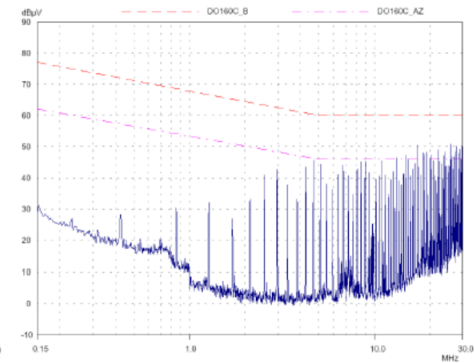

4. Specifications

12.1" TFT LCD DISPLAY & RESISTOR TOUCH SCREEN

Resolution	1024x768 XGA	Brightness	1300 Nits
Aspect Ratio	4:3	Contrast Ratio	900
Touch Panel	Glass-Film-Glass 5-Wire resistor touch panel (Optional)		

SYSTEM SPEC

Dual Mode	Day Mode: Ultra-Brightness 1300 nits; Night Mode: NVIS (Dimmable under 1% Nits)		
Function key	7 Soft Touch Buttons, including : 3 for OSD (Brightness +, Brightness-, Blackout); 3 for Programmable; 1 for power button (On/Off)		
DC-IN	18V ~ 36 V, 28Vdc		

CONNECTORS

DC-IN	Amphenol TV07RW-11-54P		
IO Ports	X1:DVI (Amphenol TV07RW-13-35S); X2:2xUSB (Amphenol TV07RW-13-98S)		

APPLICATIONS

Applications	Marine, Naval, Ground and Airborne environment.		
---------------------	---	--	--

PHYSICAL

Dimension	310 x 280 x 90 mm (W x D x H)		
Weight	TBD	Finish	Anodic aluminum oxide
Chassis	Aluminum Alloy, Corrosion Resistant.	Ingress Protection	IP65 Dust /water Proof

MIL COMPLIANCE

MIL-STD-810G (OPERATION TEST)			
Low Temp.	Method 502.5 Procedure 2	Exposure(24h x 3 cycle) at -10°C min.	
High Temp.	Method 501.5 Procedure 2	60°C for 2 hrs after temperature stabilization.	
Humidity	Method 507.5 Procedure 2	RH -95%. Test cycles: ten 24-hrs , functional test after 5th and 10th cycles	
Vibration	Method 514.6 Category 20	10-500Hz 1.04Grms Test duration: 1 hr x 3 axis (total 3 hrs)	
Shock	Method 516.6 Procedure 1	20G, 11mSec, 3 per axis	
MIL-STD-810G (NON-OPERATING TESTS)			
Low Temp.	Method 502.5	Exposure(24h x 7 cycle) at -20°C min.	
High Temp.	Method 501.5 Procedure 1	71°C for 2 hrs after temperature stabilization.	
Vibration	Method 514.6 Category 24	200 to 2000Hz Test duration: 1hr per axis; rms = 7.7 gs	
Shock	Method 516.6 Procedure 1	20G, 11mSec, 3 per axis	


4. Specifications

MIL-STD-461E	
CE102	Basic curve, 10kHz - 30 MHz
RE102-4, (1.5 MHz)	(1.5 MHz) -30 MHz - 5 GHz
RS103	1.5 MHz - 5 GHz, 50 V/m equal for all frequencies EN 61000-4-2: Air discharge: 8 kV,

ENVIRONMENTAL QUALIFICATIONS

Regulatory	CE ,FCC Compliance
Operation Temp.	-40~+70 °C
Storage Temp.	-40~+85 °C
Green Product	RoHS, WEEE compliance

5. Dimension

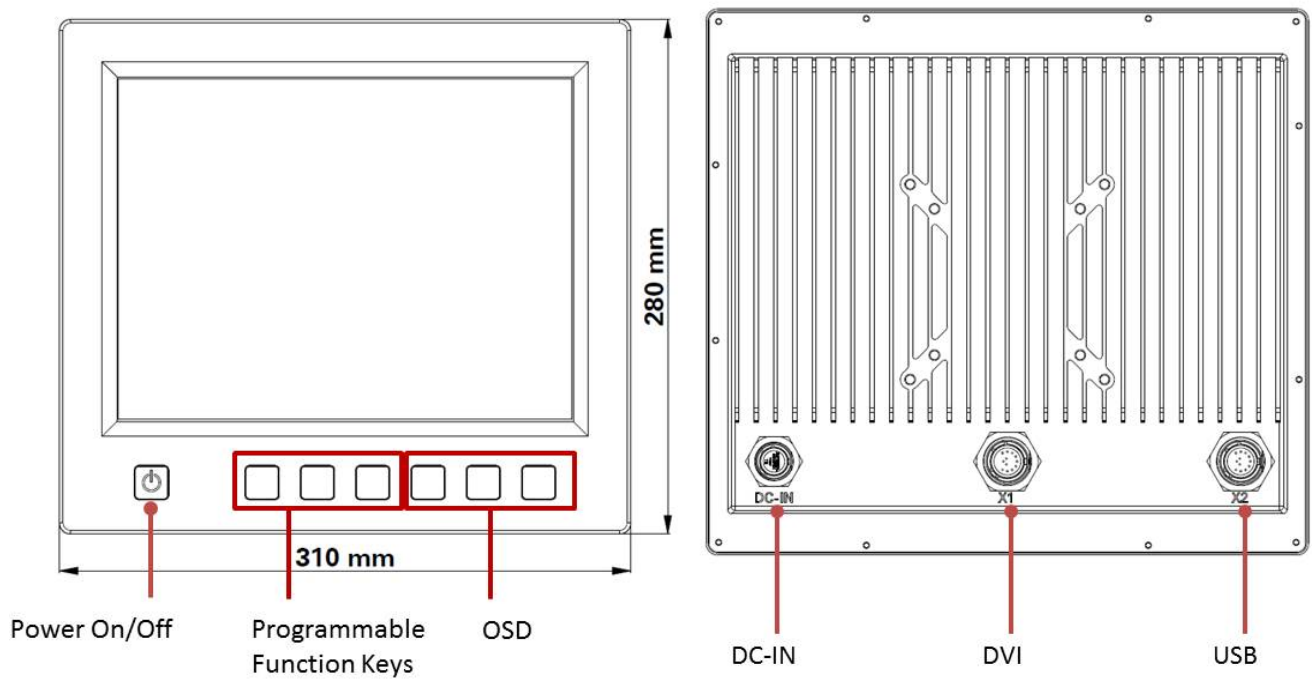

6. Ordering Information

SKY12-X06 12" Rugged Smart Display with 3 x MIL-DTL-38999 connectors, 7 Soft button /w programmable function keys, Night Vision Mode & Super High Brightness 1300 Nits Support

Model	Description
SKY12-X06	12" Rugged Smart Display with 3 x MIL-DTL-38999 connectors, G.F.G Resistive Touch, 7 Soft button /w programmable function keys, Night Vision Mode & Super High Brightness 1300 Nits Support, Extended Temperature -40~+70 °C



7STARLAKE

2F., No.190, Sec. 2, Zhongxing Rd., Xindian Dist., New Taipei City 23146, Taiwan (R.O.C.)

Tel: 886-2-7744-7738

Fax: 886-2-8911-2324

Email: press@7starlake.com

<https://7starlake.com/>