



THOR50

Rugged 3U Server



- Rugged 3U Server
- 4th / 5th Gen. Intel® Xeon® Scalable Processor
- Quadro RTX A6000 GPU Card
- MIL-STD-810 Vibration and Shock Resistance
- Design to Meet MIL-STD-461
- AC230V 600W/800W Redundant Power Supply
- I/O By Rugged Lockable DTL38999 & M20 Connector
- I/O : 1x IPMI, 1x DVI-I, 1x HDMI, 4x 10GbE Ethernet, 3x USB3.0, 2x COM
- Extended Temperature -20~+55 Degree



LAND



SEA



AIR



INDEX

- 1. INTRODUCTION**
- 2. MAIN FEATURE**
- 3. MIL-STD 810**
- 4. SYSTEM SPEC**
- 5. DIMENSION**

1. Introduction



7starlake's THOR30 rugged MIL server is ideal for use in high and low temperature environments that are subject to shock and vibration. 7starlake's rugged servers are designed for use in hostile environments including military COTS use where the performance

of the latest Intel processors are required and full size expansion cards need to be fitted. Versions with drip proof water ingress protection are also available as special build options.

THOR30 server is part of 7starlake well established and field proven rugged computer family and is designed to comply with MIL-STD-810 for use in aircraft, mobile or fixed land-based systems, transportation and naval environments below decks as well as general use where a ruggedized system is required.

2. Main Features

- 1x 4th /5th Gen. Intel® Xeon® Scalable Processor
- Up to 4TB ECC L/RDIMM, DDR5-5600/5200/4800/4400/4000 MHz.
- 1x 2.5" Drive Bays
- 230V AC 600W/800W Redundant Power Supply
- MIL-STD-810 Anti Vibration, Shock
- I/O : 1x DVI-I, 1x HDMI, 4x GbE Ethernet, 3x USB 3.0, 3x COM

3. MIL-STD Environment

The standard build of the THOR Series is designed to meet to the following typical requirements and is based on similar formally tested systems in the same range of field proven rugged servers.

3-1. MIL-STD-810

A) Random vibration test (Operating)

- Frequency : 10 Hz to 500 Hz
- Acceleration : 1.04g rms
- Test Axis : X, Y, Z axis
- Test Time : 10 mins (Each axis)
- Total Test Time : 0.5 hrs

B) Random Shock Test (Operating)

- Wave Form : Half Sine Wave
- Acceleration : 20 g rms
- Duration : 11 mS
- Shock Direction : $\pm Z$ axis
- No. of Shock : Each axis 1 time

C) Random vibration test (None-Operating)

- Frequency : 10 Hz to 500 Hz
- Acceleration : 3 g rms
- Test Axis : X, Y, Z axis
- Test Time : 10 mins (Each axis)
- Total Test Time : 0.5 hrs

D) Shock Test (None-Operating)

- Wave Form : Half Sine Wave
- Acceleration : 32 g rms
- Duration : 11 mS
- Shock Direction : $\pm Z$ axis
- No. of Shock : Each axis 1 time

E) THOR30 Test (Operating)

Low Temperature	Method 502.4 Procedure II	-20°C
High Temperature	Method 501.4 Procedure II	55°C
Humidity	Method 507.4	5x 48 hour cycles
Vibration	Method 514.5 Category 4	10 Hz—500Hz 1.04g rms
Shock	Method 516.5	20G 11mSec TPS 3 axis

F) THOR30 Test (Non-Operating)

Shock	Method 516.5	32G 11ms TPS 3 axis
Low Temperature storage	Method 501.4	-30°C
High Temperature storage	Method 502.4 Procedure I	+70°C
Vibration	514.6 Category 4 fig 514.6C-VI	10Hz to 500Hz @ 3 Grms

3-2 Power

- AC Redundant Power Supply 230V 600W/800W
- Options : MIL-461 RE102/CE102 EMI Filter

4. System Specs

System

CPU	4 th /5 th Gen. Intel® Xeon® Scalable Processor
4 th Gen. CPU	Intel® Xeon® Platinum 8468 Processor, 48C, 105M Cache, 2.10 GHz, 350W Intel® Xeon® Gold 6443N Processor, 32C, 60M Cache, 1.90 GHz, 195W Intel® Xeon® Gold 6430 Processor, 32C, 60M Cache, 2.10 GHz, 270W Intel® Xeon® Silver 4416+ Processor, 20C, 37.5M Cache, 2.00 GHz, 165W
5 th Gen. CPU	Intel® Xeon® Platinum 8580 Processor, 60C, 300M Cache, 2.00 GHz, 350W Intel® Xeon® Gold 6554S Processor, 36C, 180M Cache, 2.20 GHz, 270W Intel® Xeon® Gold 6538N Processor, 32C, 60M Cache, 2.10 GHz, 205W Intel® Xeon® Gold 5512U Processor, 28C, 52.5M Cache, 2.10 GHz, 185W Intel® Xeon® Silver 4516Y+ Processor, 24C, 45M Cache, 2.20 GHz, 185W
Memory type	4 th Gen. Up to 4TB ECC L/RDIMM, DDR5-4400/4000MHz 5 th Gen. Up to 4TB ECC L/RDIMM, DDR5-5600/5200/4800/4400MHz
GPU	NVIDIA Quadro RTX A6000 GPU Card NVIDIA GTX1050Ti GPU Card

Storage

HDD/SSD 1x 2.5" SATA SSD/HDD

Ethernet

Ethernet 4x 10GbE

Rear I/O

X1 1x DVI-I

X2 1x HDMI

X3~X5 3x USB3.0

X6~X7 4x 10GbE



X8~12 3x RS232...

Power connector 1x D38999 Power connector

OS Support List

Windows	Windows 10 64bit, Windows Server 2016, Windows Server 2019, RedHat Linux EL 8.2,
Dimension	437mm x 480mm x 132mm (W x D x H)
Weight	20 KG
Operating Temp.	-20 to 55°C
Storage Temp.	-30°C to 70°C
Relative Humidity	5% to 95%, non-condensing

5. Dimension

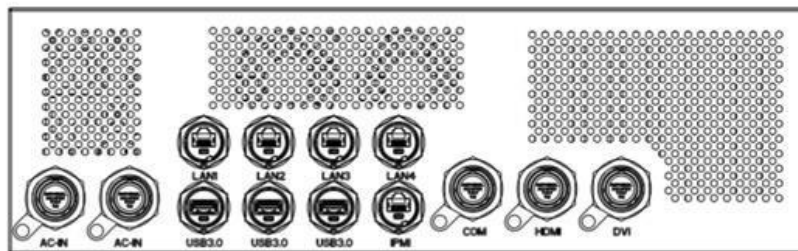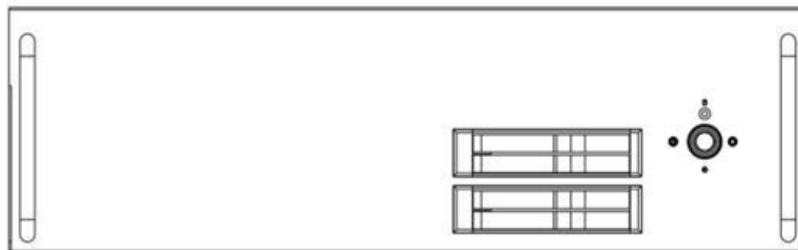

(Preliminary, the final enclosure and I/O will be changed)