




SK518-D28

**COH-HPC Server Type D Carrier Board with PCIe/104,
Slim-SAS Express Expansions Extreme temperature -40°C
to 85°C**

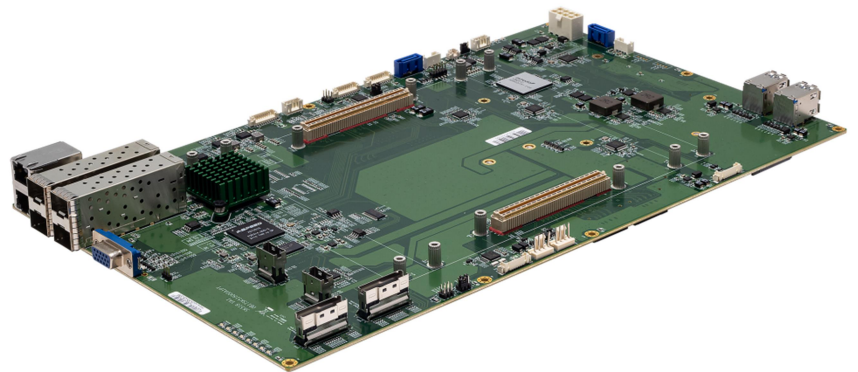

Extended
Temperature
+85°C
-40°C

- COM-HPC Server (D) Support Intel ICE-Lake D HCC
- PCIe/104 Express Expansion Slot for Rugged StackPC
- Multi-Expansion Slots :
 - 4 x Slim-SAS(Vertical) (2 x PCIe Gen4 x 4 / 2 x PCIe Gen4 x 8)**
 - 1 x mPCIe(Full Size)**
 - 2 x M.2 2280 M-Key(PCIe Gen4 x 4)**
- I/O : 2 x GbE, 4 x 10GbE, 1 x VGA, 2 x SATAIII, 2 x COM(RS232), 4 x USB3.0, 2 x USB2.0, 1 x DIDO
- 12V DC Input
- Extreme Temperature -40°C to 85°C

Specifications

SYSTEM

CPU	Intel ICE-Lake HCC D-2800 Series : D-2899NT, 22C / 44T, 2.2/3.1GHz, 30M Cache, TDP : 135W D-2896NT, 20C / 40T, 2.0/3.2GHz, 25M Cache, TDP : 117W D-2876NT, 16C / 32T, 2.0/3.1GHz, 20M Cache, TDP : 100W
Memory type	DDR4 R-DIMMs up to 1024GB
Chipset	On CPU Module
Storage	SlimSAS/M.2/SATA interface
Watchdog	On CPU module : 1-255 sec. or 1-255 min. software programmable and can be generate system reset.

EXPANSION SLOT

PCIe/104 (Type2)	1(2*PCIe Gen3 x 4/4*PCllexGen3 x 1/2*SATA)
Slim-SAS (Vertical)	2(PCIe Gen4 x 8)
Slim-SAS (Vertical)	2(PCIe Gen4 x 4)
MiniPCIe (Full Size)	1(PCIe Gen3 x 1)
M.2	2(M.2 2280 M-Key)(PCIe Gen4 x 4)

DISPLAY

Chipset	On CPU Module / AST2510
VGA	1

ETHERNET

Chipset	1 x Intel® I210iT 1 x C827
IPMI	AST2500 by request

EXTERNAL I/O

VGA	1
USB3.0	4
10GbE	4

GbE	2
-----	---

INTERNAL I/O

USB2.0	2(Header)
--------	-----------

DIDO	1(4in/4out)
------	-------------

SATAIII	2
---------	---

SATA Power	2
------------	---

Serial	2 (RS232)
--------	-----------

SM BUS/I2C BUS	1
----------------	---

LPC	1
-----	---

System Fan	1
------------	---

CPU Fan	1
---------	---

Front Panel Control	1
---------------------	---

Power Connector	1(2 x 4-pin terminal block)
-----------------	-----------------------------

MECHANICAL AND ENVIRONMENTAL

Form Factor	COM-HPC Carrier Server Type D
-------------	-------------------------------

Power Type	DC-IN 12V
------------	-----------

Dimension	350mm x 210mm
-----------	---------------

Operating Temperature	-40 to 85°C
-----------------------	-------------

Storage Temperature	-40 to 85°C
---------------------	-------------

Relative humidity	10% to 90%, non-condensing
-------------------	----------------------------


STANDARD COMPLIANCE

Standard Compliance	CE/FCC
---------------------	--------


OS

OS	On CPU Module
----	---------------


Block Diagram

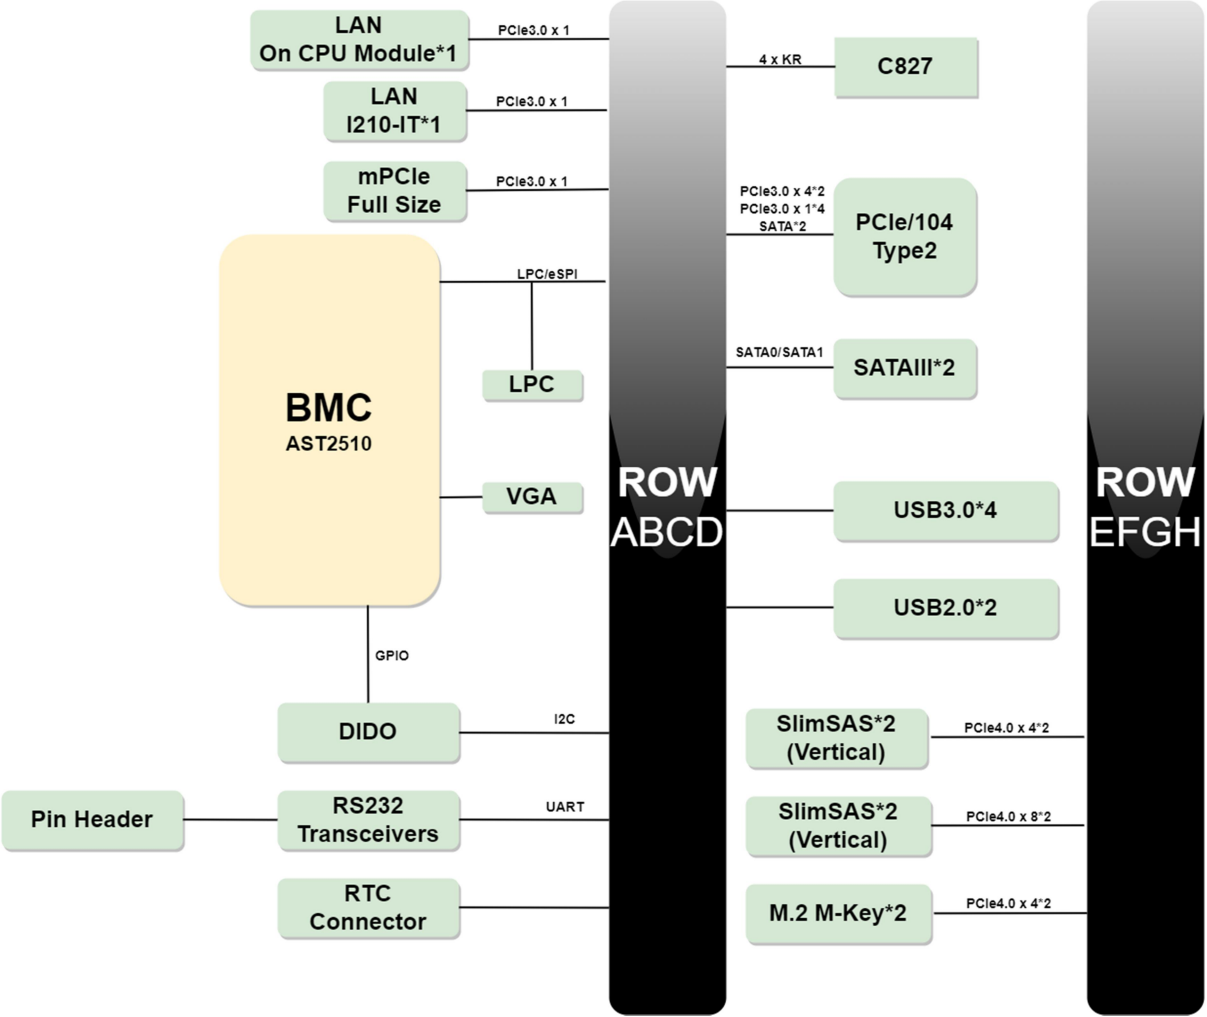

Dimension

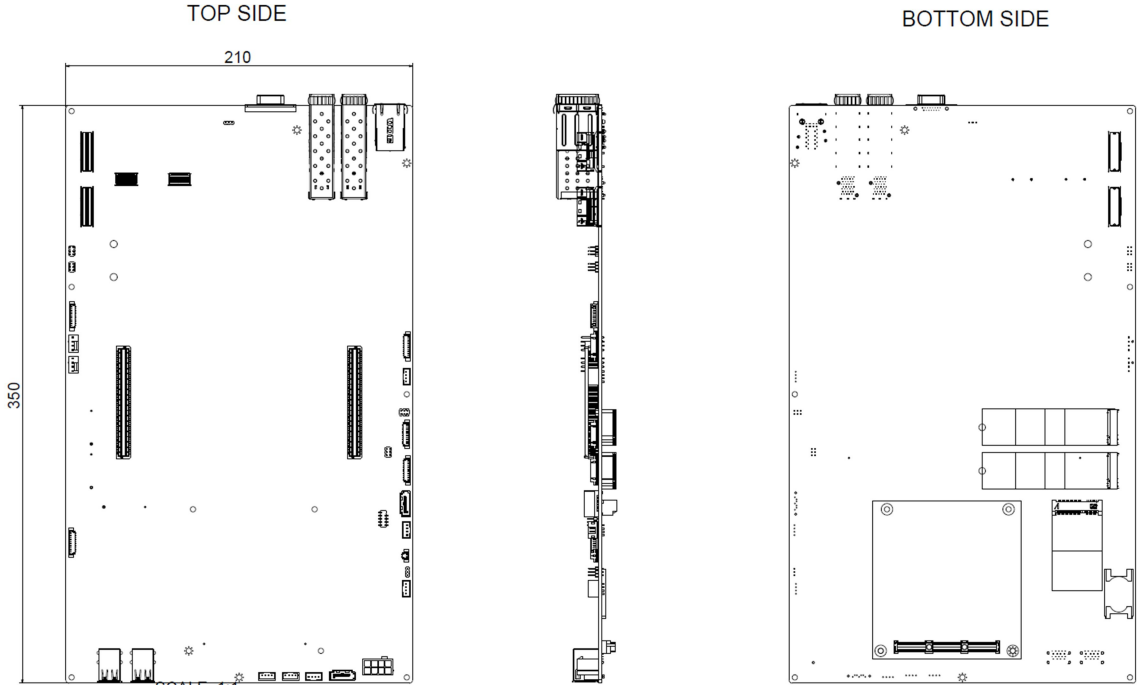

Appearance

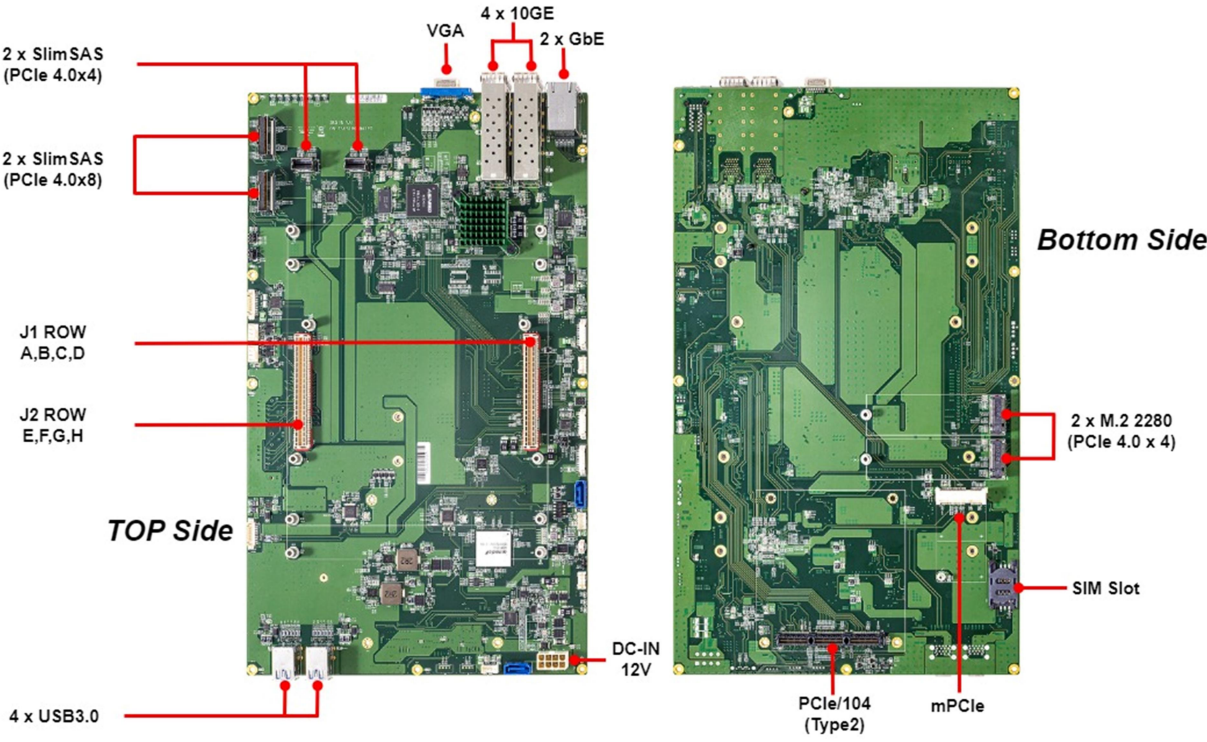

CPU/GPU Table

CPU Products List

	CPU	SPEC
Intel	D-2899NT	22C / 44T, 2.2/3.1GHz, 30M Cache, TDP : 135W
	D-2896NT	20C / 40T, 2.0/3.2GHz, 25M Cache, TDP : 117W
	D-2876NT	16C / 32T, 2.0/3.1GHz, 20M Cache, TDP : 10W

GPU Products List

GPU	CUDA Cores	Memory	TDP
NVIDIA® RTX A4500	5,888 CUDA Core	GDDR6 16GB	80W
NVIDIA® RTX A2000	2,560 CUDA core	GDDR6 8GB	60W

Ordering Information

COMe Type	Model Name	Configuration
COM-HPC	SK518-D2899NT-A45	CPU : D-2899NT / MXM GPU :RTX A4500
	SK518-D2896NT-A20	CPU : D-2896NT / MXM GPU :RTX A2000
	SK518-D2876NT-A20	CPU : D-2876NT / MXM GPU :RTX A2000