



Test Report

According to

MIL-STD-461E
(CE102; RE102; RS103)

Product : Rugged Fanless computer

Trade Name : N/A

Model Number : SR800-XXXX
(X= 0~9 , A~Z, a~z, - or blank)

Prepared for

Perfectron Co., Ltd. Taiwan Branch

2F., No. 190, Sec. 2, Zhongxing Rd., Xindian Dist.,
New Taipei City 23146, Taiwan (R.O.C.)

TEL.: +886 2-8911-8077

FAX.: +886 2-8911-2324

Issued by

Interocean EMC Technology Corp.

Interocean EMC Technology Tin-Fu Laboratory

No. 5-2, Lin 1, Tin-Fu, Lin-Kou Dist., New Taipei City,
Taiwan 244, R.O.C.

TEL.: +886 2 2600 6861

FAX.: +886 2 2600 6859

Remark:

The test report consists of **32** pages in total. It shall not be reproduced except in full, without the written approval of IETC. This document may be altered or revised by IETC only, and shall be noted in the revision section of the document.

The test result in this report is only subjected to the test sample.



Table of Contents

1	Conducted emissions, power leads Test (CE102)	5
1.1	Instrument	5
1.2	Block Diagram of Test Configuration	5
1.3	Test Limit	5
1.4	Configuration of Measurement	6
1.5	System Calibration Check	7
1.6	Test Result	7
2	Radiated emissions, electric field Test (RE102)	12
2.1	Instrument	12
2.2	Block Diagram of Test Configuration	12
2.3	RE102 Application	13
2.4	Configuration of Measurement	15
2.5	System Calibration Check	15
2.6	Test Result	15
3	Radiated susceptibility, electric field Test (RS103)	25
3.1	Instrument	25
3.2	Block Diagram of Test Configuration	25
3.3	Test Limit	26
3.4	Configuration of Measurement	26
3.5	Test Result	26
4	Photographs of Test	28
4.1	Conducted emissions, power leads Test (CE102)	28
4.2	Radiated emissions, electric field Test (RE102)	29
4.3	Radiated susceptibility, electric field Test (RS103)	31
5	Photographs of EUT	32
5.1	Model No.: SR800	32
附錄 1 : MIL-STD-461E (RS103) (Test by NCSIST LAB)		



Statement of Compliance

Applicant : Perfectron Co., Ltd. Taiwan Branch
2F., No. 190, Sec. 2, Zhongxing Rd., Xindian Dist.,
New Taipei City 23146, Taiwan (R.O.C.)

Manufacturer : Perfectron Co., Ltd. Taiwan Branch
2F., No. 190, Sec. 2, Zhongxing Rd., Xindian Dist.,
New Taipei City 23146, Taiwan (R.O.C.)

Product : Rugged Fanless computer

Model No. : SR800-XXXX (X= 0~9 , A~Z, A~Z, - OR BLANK)

Additional Description :

- 1.) The test model is "SR800" and included in this report.
- 2.) The differences for all models included in this report are for different markets.
- 3.) For more detail specification about EUT, please refer to the user's manual.

Tested Power Voltage : DC 24 V

Date of Test : Sep. 05 ~ 17, 2019

Revision of Report: Rev. 01

Measurement Procedures and Standards Used :

Test result is compliance with MIL-STD-461E (CE102; RE102; CS101; RS103)

Applicable Standards			
Standard	Special	Location of Test	Test Result
MIL-STD-461E (CE102)	Frequency Range: 10 kHz - 30 MHz	IETC LAB	PASS
MIL-STD-461E (RE102)	Frequency Range: 10 kHz - 18 GHz	IETC LAB	PASS
MIL-STD-461E (RS103)	Frequency Range: 1.5 MHz - 200 MHz	NCSIST LAB *	PASS
	Frequency Range: 200 MHz – 3.2 GHz	IETC LAB	PASS
	Frequency Range: 3.0 GHz – 5.0 GHz	NCSIST LAB *	PASS

Note: 1. " * " means external resources / subcontractors (NCSIST LAB, TAF Accreditation No.: 0533) was used to perform testing.
 2. The test mode for final test are as following:
 ● Mode 1: Working Mode

The measurement results in this test report were performed at Interocean EMC Technology Corp. the responsibility of measurement result is only subjected to the tested sample. This report shows the EUT is technically compliance with the above official standards. This report shall not be partial reproduced without written approval by Interocean EMC Technology Corporation.

Report Issued: 2019/10/07

Project Engineer: Zac Lin
Zac Lin

Approved: Vin Chou
Vin Chou



Test Facility

- Site Description** : Chamber 3 & 6 (IETC LAB) RS Chamber (NCSIST LAB)
- Name of Firm** : Interocean EMC Technology Corp.
- Company web** : <http://www.ietc.com.tw>
- Location** : No. 5-2, Lin 1, Tin-Fu, Lin-Kou Dist., New Taipei City, Taiwan 244, R.O.C.
- Site Filing** :
- Federal Communication Commissions – USA
Designation No.: TW1020 (Test Firm Registration #: 651092)
Designation No.: TW1113 (Test Firm Registration #: 959554)
 - Innovation, Science and Economic Development Canada (ISED)
CAB identifier: TW1113 (Ref. No 14962756)
 - Voluntary Control Council for Interference by Information Technology Equipment (VCCI) – Japan
Member No.: 1349
Registration No. (Conducted Room): C-11094
Registration No. (Conducted Room): T-11562
Registration No. (OATS 1): R-11040; G-10274
- Site Accreditation** :
- Bureau of Standards and Metrology and Inspection (BSMI) – Taiwan, R.O.C.
Accreditation No.:
SL2-IN-E-0026 for CNS 13438 / CISPR 22
SL2-R1-E-0026 for CNS 13439 / CISPR 13
SL2-R2-E-0026 for CNS 13439 / CISPR 13
SL2-L1-E-0026 for CNS 14115 / CISPR 15
 - Taiwan Accreditation Foundation (TAF)
Accreditation No.: 1113
 - American Association for Laboratory Accreditation (A2LA)
Certificate Number: 4891.01
 - Vehicle Safety Certification Center (VSCC)
Approval No.: TW16-11
 - TÜV NORD
Certificate No: TNTW0801R




1 Conducted emissions, power leads Test (CE102)

1.1 Instrument

EMI Test Receiver	Rohde & Schwarz	ESR7	101422	2019/12/10
DC LISN	Schwarzbeck	NNBL 8226	8226-519	2020/05/22
DC LISN	Schwarzbeck	NNBL 8226	8226-520	2020/05/22
RF Cable	EMCI	EMC104	CBL63	2020/03/10
RF Cable	EMCI	EMC104	CBL64	2020/03/10


Note: The above equipments are within the valid calibration period.

1.2 Block Diagram of Test Configuration

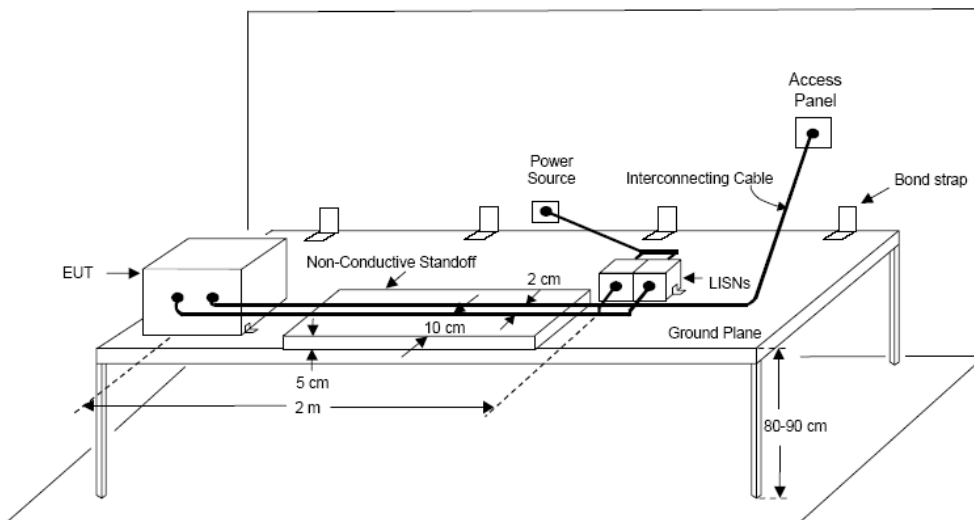

1.3 Test Limit

This Limit level is according to MIL-STD-461E sub clause 5.5.2 CE102 limit figure CE102-1.

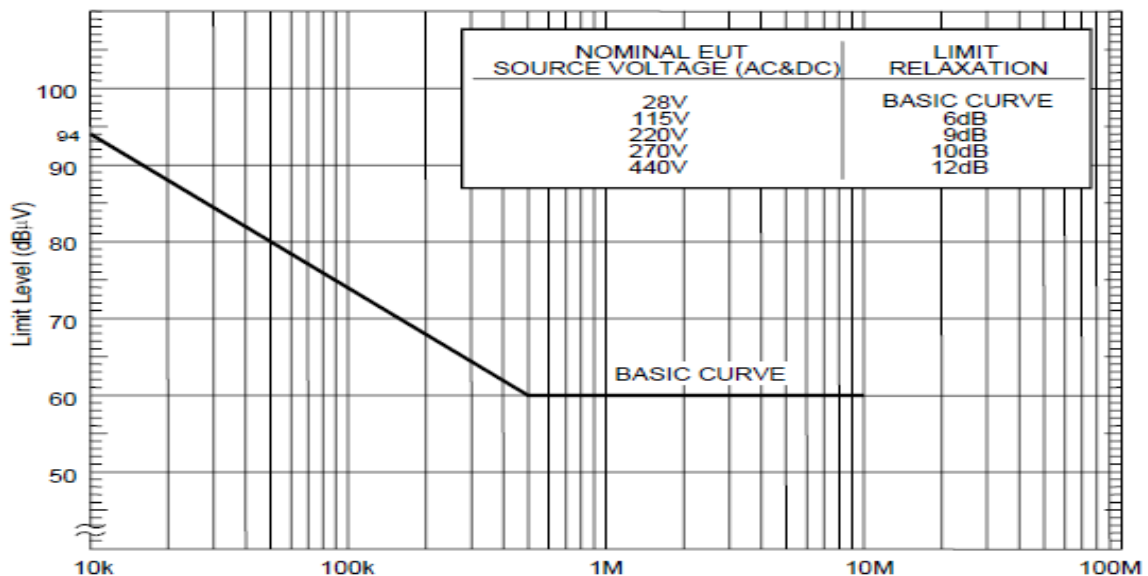

1.4 Configuration of Measurement


1.4.1 Calibration. Perform the measurement system check using the measurement system check setup of MIL-STD-461E Figure CE102-2.

- Turn on the measurement equipment and allow a sufficient time for stabilization.
- Apply a signal level that is at least 6 dB below the limit at 10 kHz, 100 kHz, 2 MHz and 10 MHz to the power output terminal of the LISN. At 10 kHz and 100 kHz, use an oscilloscope to calibrate the signal level and verify that it is sinusoidal. At 2 MHz and 10 MHz, use a calibrated output level directly from a 50 Ω signal generator.
- Scan the measurement receiver for each frequency in the same manner as a normal data scan. Verify that the measurement receiver indicates a level within ± 3 dB of the injected level. Correction factors shall be applied for the 20 dB attenuator and the voltage drop due to the LISN 0.25 μ F coupling capacitor.
- If readings are obtained which deviate by more than ± 3 dB, locate the source of the error and correct the deficiency prior to proceeding with the testing.
- Repeat MIL-STD-461E sub clause 5.5.3.4a(2) through MIL-STD-461E sub clause 5.5.3.4a(4) for each LISN.

1.4.2 EUT testing. Perform emission data scans using the measurement setup of **MIL-STD-461E Figure CE102-3**.

- Turn on the EUT and allow a sufficient time for stabilization.
- Select an appropriate lead for testing.
- Scan the measurement receiver over the applicable frequency range, using the bandwidths and minimum measurement times in the MIL-STD-461E Table II.
- Repeat MIL-STD-461E sub clause 5.5.3.4b(2) and MIL-STD-461E sub clause 5.5.3.4b(3) for each power lead.

FIGURE CE102-3. Measurement setup.

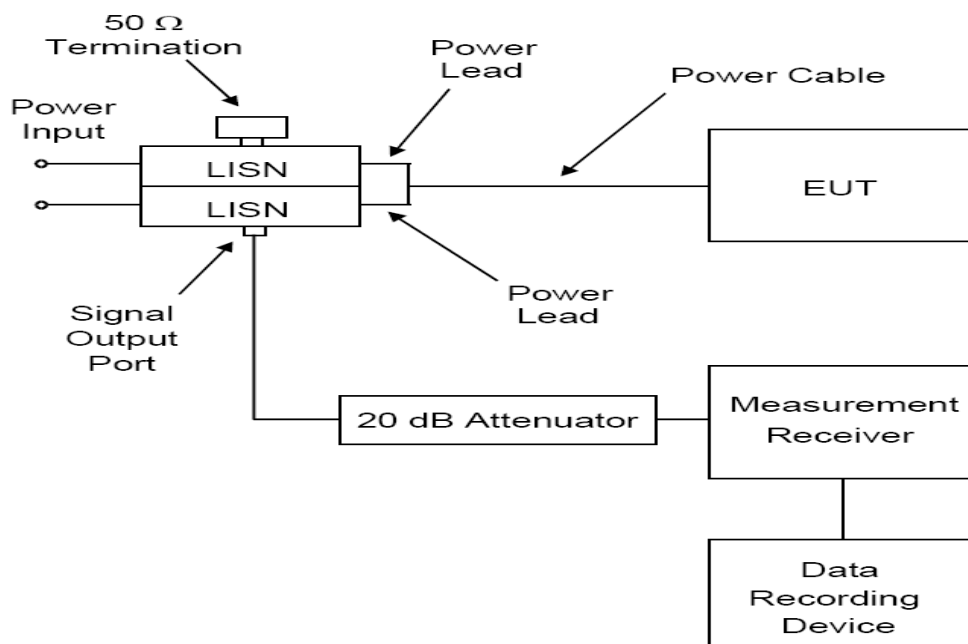



1.5 System Calibration Check


Based on MIL-STD-461E sub clause 5.5.3.4 system calibration requirement to verify the calibration level within ± 3 dB at 10 kHz, 100 kHz, 2 MHz and 10 MHz.

1.6 Test Result

The final test data is shown as following pages.




Job No.:	19A081601V	Polarization:	L1
Standard:	MIL-STD-461E (1999)_CE102_28V_0.01~30M	Power Source:	DC 24 V
Test item:	Conduction Test	Date:	2019 / 9 / 5
Temp.(°C)/Hum.(%):	22.6(°C)/55%	Time:	下午 03:14:37
Company:	Perfectron Co., Ltd. Taiwan Branch	Engineer Signature:	Harvey Tsai
Trade Name:	Rugged Fanless computer	Distance:	None
Model:	SR800	RBW: 1 kHz	VBW: 1 kHz
Description:			

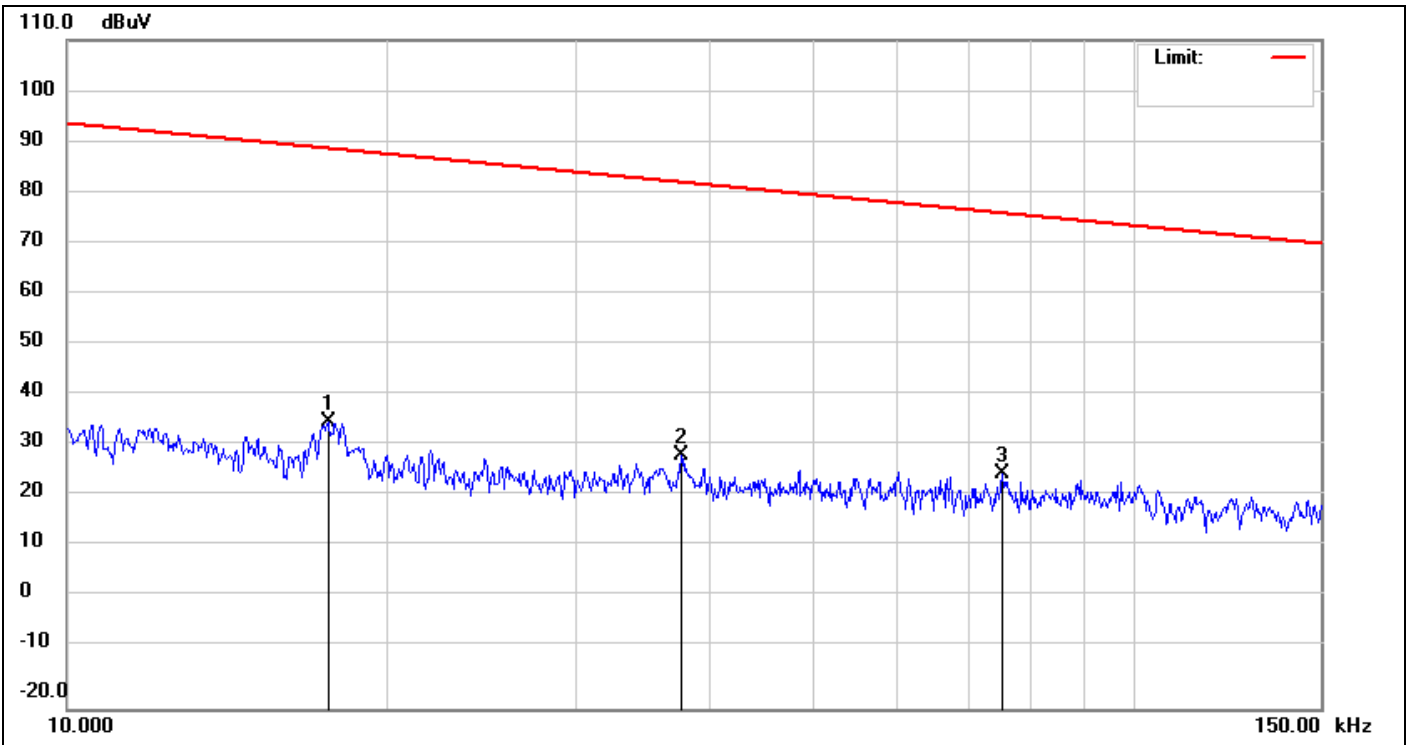

No.	Frequency (KHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	17.5640	32.64	2.99	35.63	89.10	-53.47	peak	P	
2	37.6950	28.42	0.85	29.27	82.47	-53.20	peak	P	
3	75.3990	25.35	0.31	25.66	76.44	-50.78	peak	P	




Job No.:	19A081601V	Polarization:	L1
Standard:	MIL-STD-461E (1999)_CE102_28V_0.01~30M	Power Source:	DC 24 V
Test item:	Conduction Test	Date:	2019 / 9 / 5
Temp.(°C)/Hum.(%):	22.6(°C)/55%	Time:	下午 03:25:19
Company:	Perfectron Co., Ltd. Taiwan Branch	Engineer Signature:	Harvey Tsai
Trade Name:	Rugged Fanless computer	Distance:	None
Model:	SR800	RBW: 10 kHz	VBW: 10 kHz
Description:			

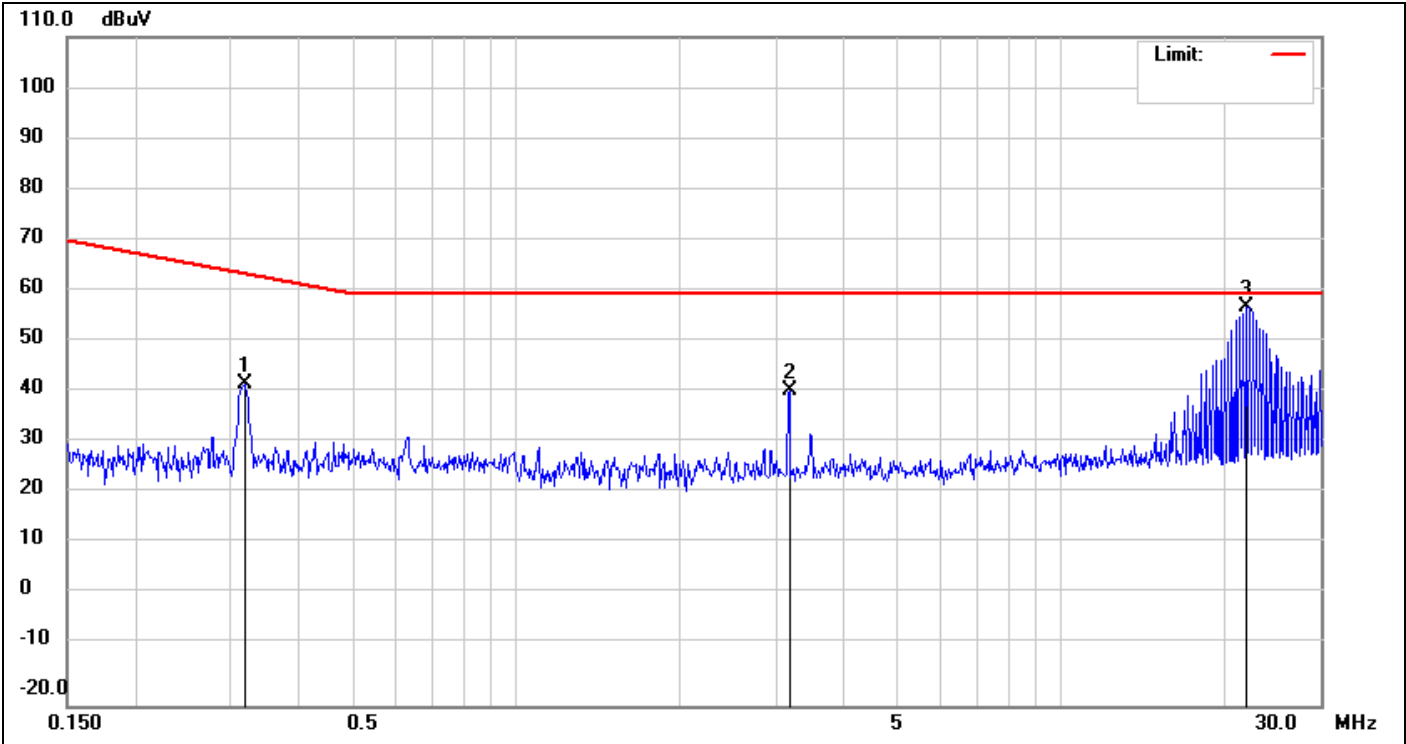

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.3183	42.17	0.29	42.46	63.92	-21.46	peak	P	
2	3.1731	40.86	0.33	41.19	60.00	-18.81	peak	P	
3	21.8303	56.92	0.69	57.61	60.00	-2.39	peak	P	




Job No.:	19A081601V	Polarization:	N
Standard:	MIL-STD-461E (1999)_CE102_28V_0.01~30M	Power Source:	DC 24 V
Test item:	Conduction Test	Date:	2019 / 9 / 5
Temp.(°C)/Hum.(%):	22.6(°C)/55%	Time:	下午 03:29:04
Company:	Perfectron Co., Ltd. Taiwan Branch	Engineer Signature:	Harvey Tsai
Trade Name:	Rugged Fanless computer	Distance:	None
Model:	SR800	RBW: 1 kHz	VBW: 1 kHz
Description:			

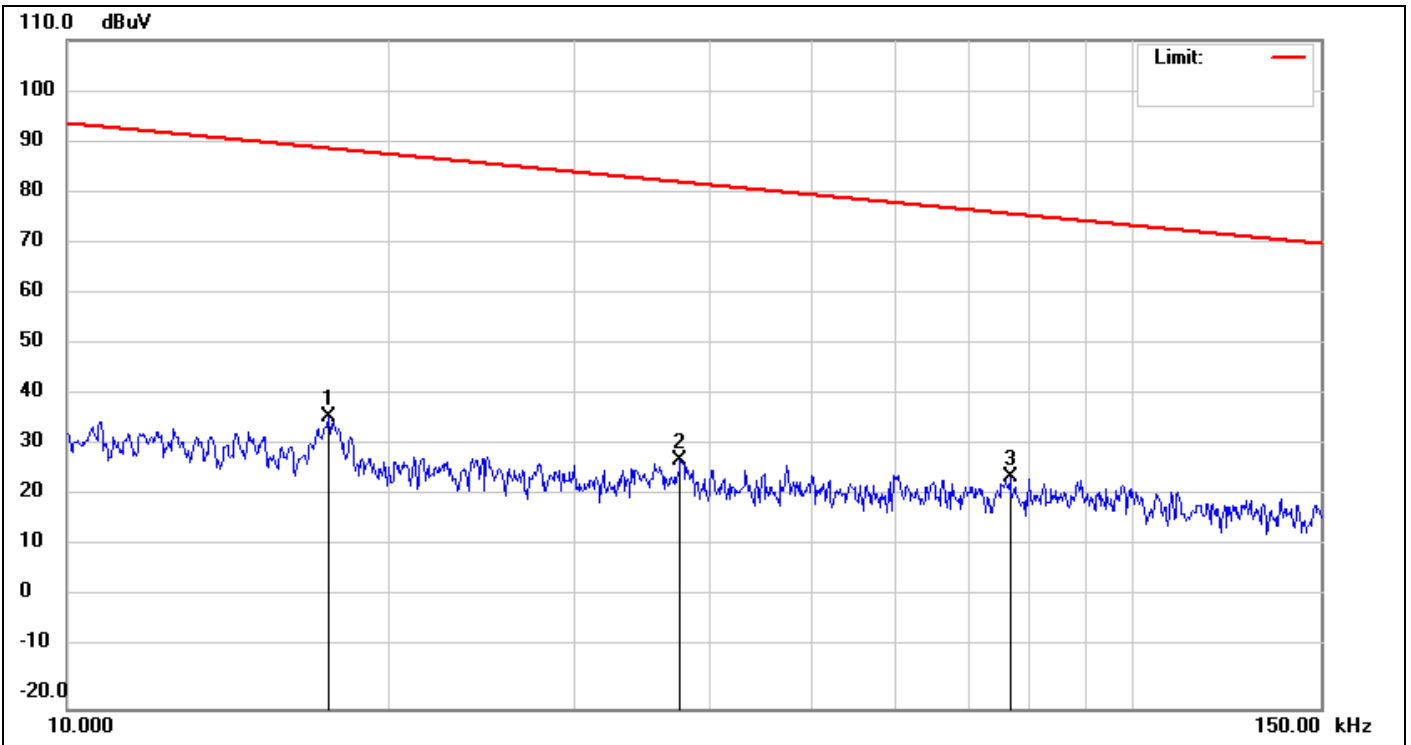

No.	Frequency (KHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	17.5640	33.50	3.09	36.59	89.10	-52.51	peak	P	
2	37.5930	27.28	0.92	28.20	82.49	-54.29	peak	P	
3	76.6340	24.79	0.34	25.13	76.30	-51.17	peak	P	



Job No.:	19A081601V	Polarization:	N
Standard:	MIL-STD-461E (1999)_CE102_28V_0.01~30M	Power Source:	DC 24 V
Test item:	Conduction Test	Date:	2019 / 9 / 5
Temp.(°C)/Hum.(%):	22.6(°C)/55%	Time:	下午 03:28:23
Company:	Perfectron Co., Ltd. Taiwan Branch	Engineer Signature:	Harvey Tsai
Trade Name:	Rugged Fanless computer	Distance:	None
Model:	SR800	RBW: 10 kHz	VBW: 10 kHz
Description:			

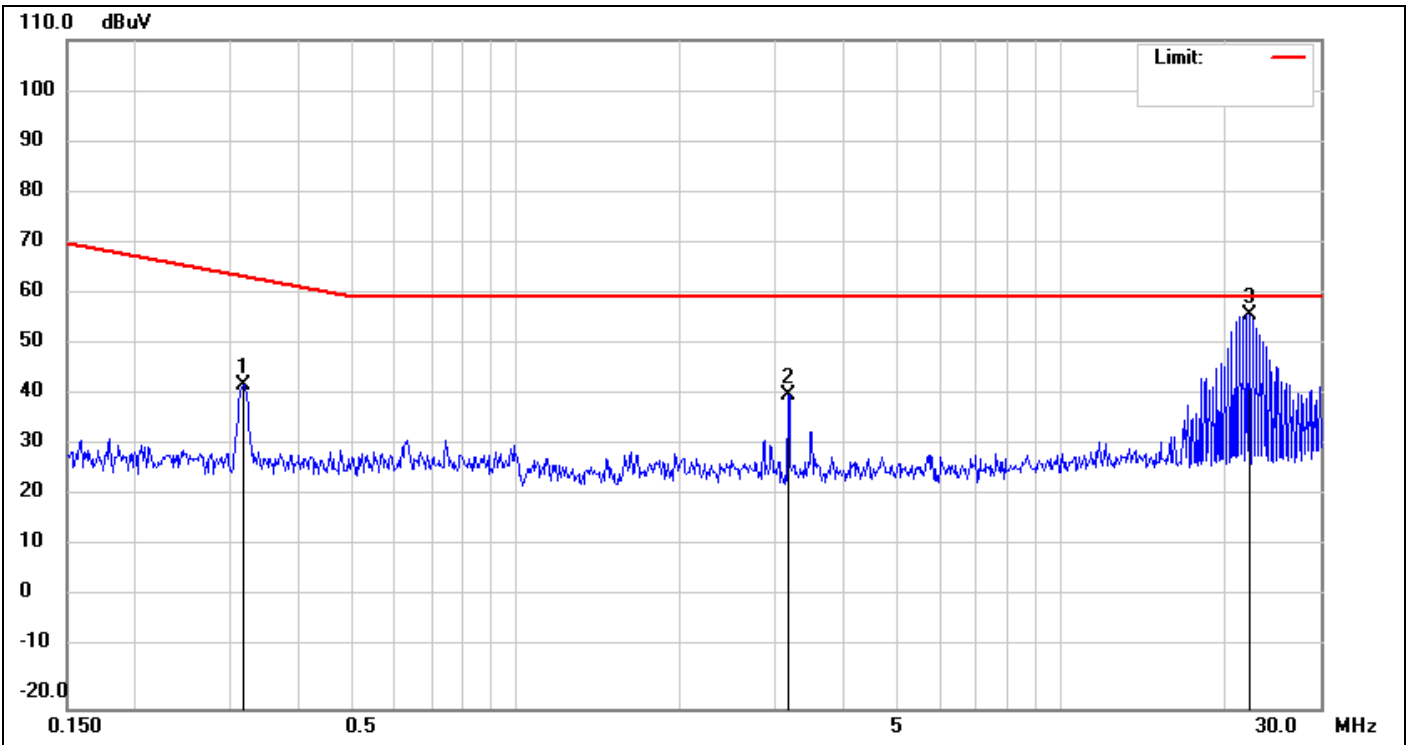

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.3166	42.64	0.30	42.94	63.97	-21.03	peak	P	
2	3.1563	40.50	0.33	40.83	60.00	-19.17	peak	P	
3	22.1801	55.89	0.67	56.56	60.00	-3.44	peak	P	


2 Radiated emissions, electric field Test (RE102)

2.1 Instrument

Instrument	Manufacturer	Model	Serial No.	Next Cal. Date
EMI Test Receiver	Rohde & Schwarz	ESR7	101422	2019/12/10
Spectrum Analyzer	R&S	FSP30	100002	2020/03/24
Monopole Antenna	ETS-Lindgren	3301C	00211334	2019/12/17
Biconical Antenna	Schwarzbeck	VHBB 9124 & BBA 9106	9124-743	2020/06/24
Horn Antenna	Schwarzbeck	VUSLP 9111B	911B-146	2020/06/24
Horn Antenna	Schwarzbeck	BBHA 9120	9120D-583	2019/10/15
Pre-Amplifier	EMCI	EMC01640	980105	2020/08/19
Pre-Amplifier	EMCI	EMC051845	980131	2020/05/23
DC LISN	Schwarzbeck	NNBL 8226	8226-519	2020/05/22
DC LISN	Schwarzbeck	NNBL 8226	8226-520	2020/05/22
RF Cable	EMCI	EMC104	CBL63	2020/03/10
RF Cable	EMCI	EMC104	CBL64	2020/03/10
RF Cable	EMCI	EMC104	CBL61	2020/03/10

Note: The above equipments are within the valid calibration period.

2.2 Block Diagram of Test Configuration

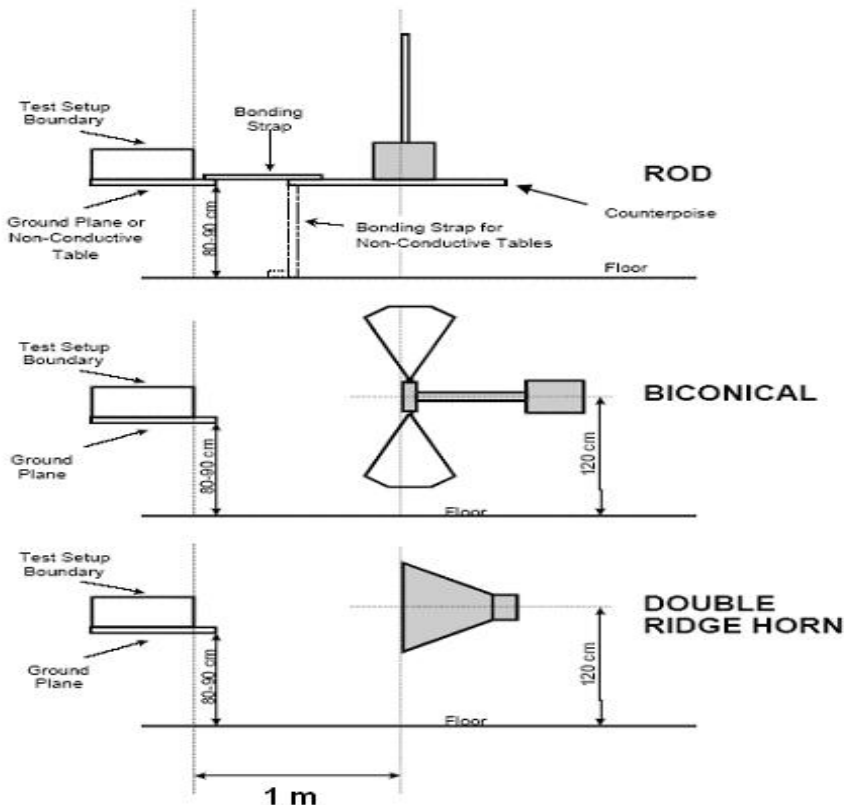



2.3 RE102 Application

2.3.1 This requirement is applicable for radiated emissions from equipment and subsystem enclosures, all interconnecting cables, and antennas designed to be permanently mounted to EUTs (receivers and transmitters in standby mode). The requirement does not apply at the transmitter fundamental frequencies. The requirement is applicable as follows:

- Ground 2 MHz to 18 GHz*
- Ships, surface 10 kHz to 18 GHz*
- Submarines 10 kHz to 18 GHz*
- Aircraft (Army) 10 kHz to 18 GHz
(Helicopters 10 kHz to 2 MHz only)
- Aircraft (Air Force and Navy) 2 MHz to 18 GHz*
- Space 10 kHz to 18 GHz*

* Testing is required up to 1 GHz or 10 times the highest intentionally generated frequency within the EUT, whichever is greater. Measurements beyond 18 GHz are not required.

FIGURE: RE102-4. RE102 limit for ground applications


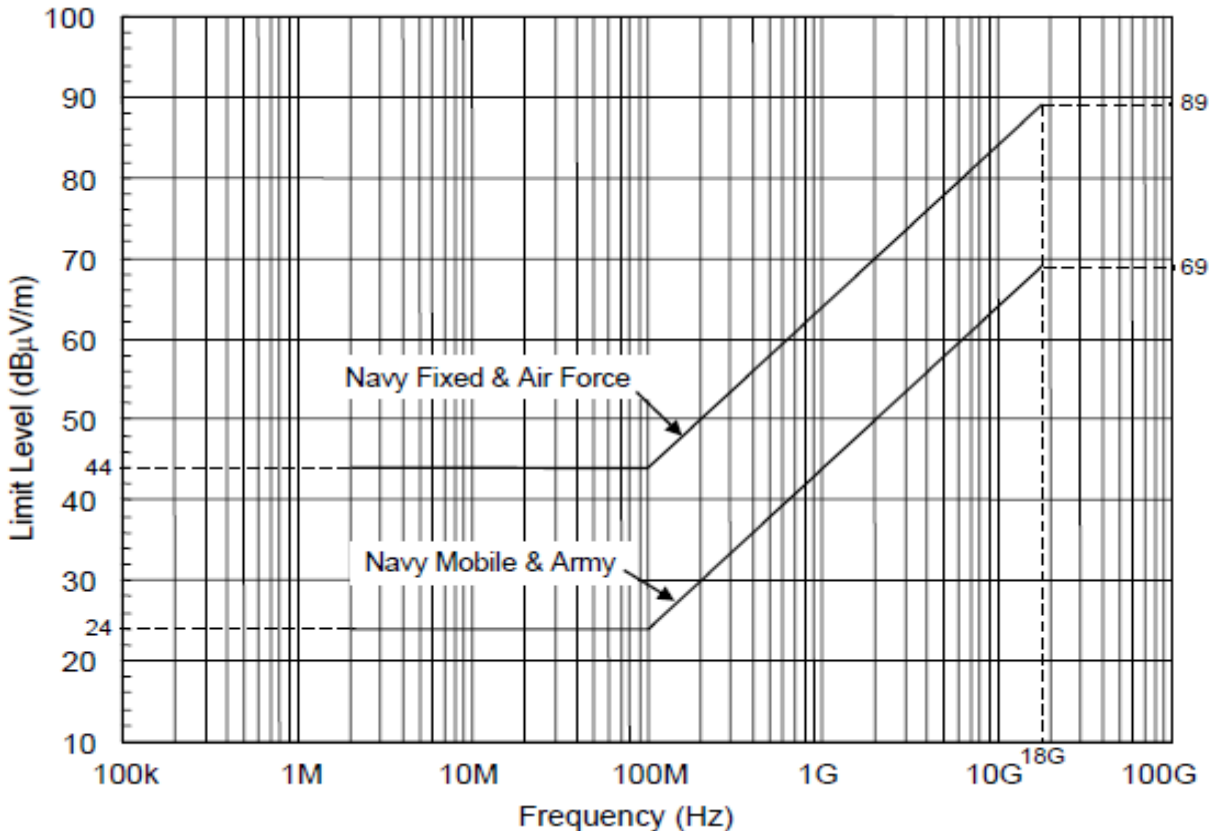




FIGURE: RE102-3. RE102 limit for aircraft and space system applications



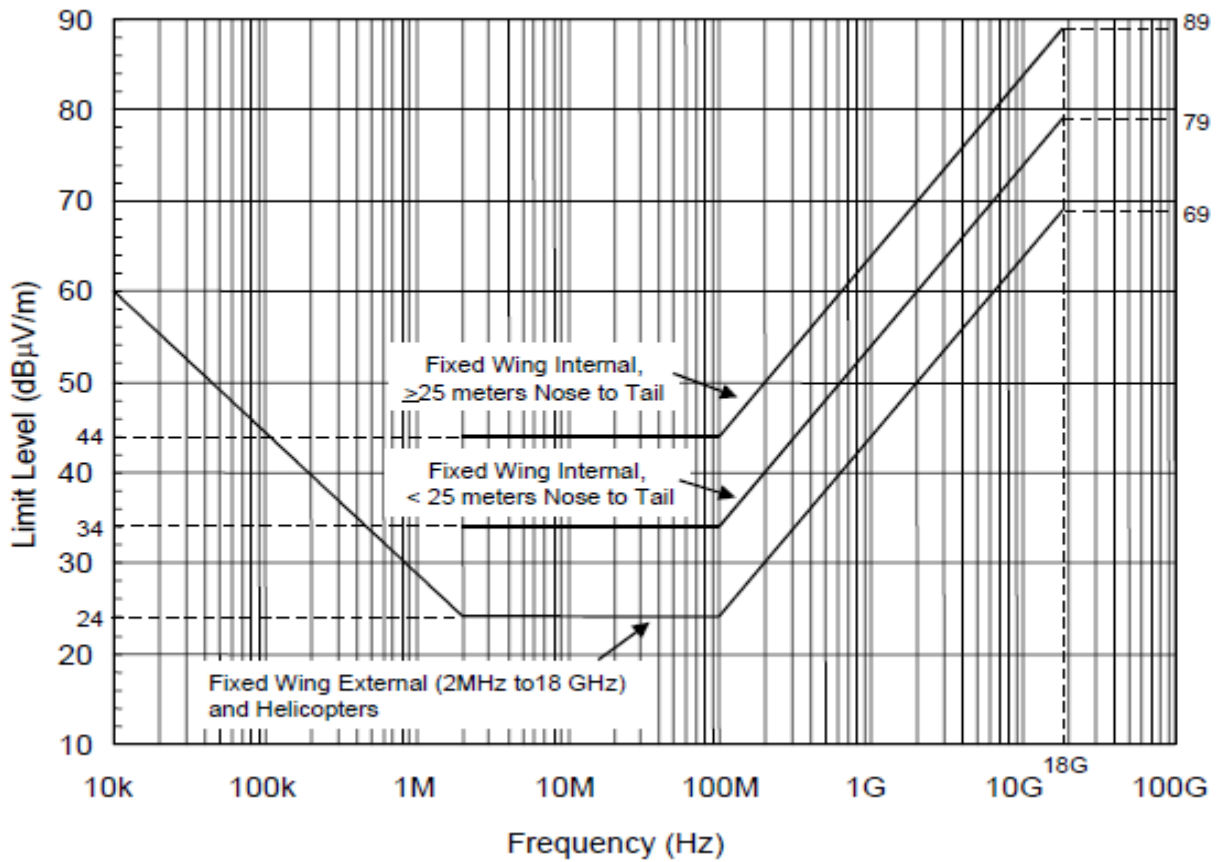

2.4 Configuration of Measurement

- 2.4.1 Verify that the ambient requirements specified in MIL-STD-461E sub clause 4.3.4 are met. Take plots of the ambient when required by the referenced paragraph.
- 2.4.2 Turn on the measurement equipment and allow a sufficient time for stabilization.
- 2.4.3 Using the system check path of MIL-STD-461E Figure RE102-5, perform the following evaluation of the overall measurement system from each antenna to the data output device at the highest measurement frequency of the antenna. For rod antennas that use passive matching networks, the evaluation shall be performed at the center frequency of each band. For active rod antennas, the evaluation shall be performed at the lowest frequency of test, at a mid-band frequency, and at the highest frequency of test.
- 2.4.4 Turn on the measurement equipment and allow sufficient time for stabilization.
- Apply a calibrated signal level, which is at least 6 dB below the limit (limit minus antenna factor), to the coaxial cable at the antenna connection point.
 - Scan the measurement receiver in the same manner as a normal data scan. Verify that the data recording device indicates a level within ± 3 dB of the injected signal level.
 - For the 104 cm rod antenna, remove the rod element and apply the signal to the antenna matching network through a 10 pF capacitor connected to the rod mount.
 - If readings are obtained which deviate by more than ± 3 dB, locate the source of the error and correct the deficiency prior to proceeding with the testing.
- 2.4.5 Using the measurement path of MIL-STD-461E Figure RE102-5, perform the following evaluation for each antenna to demonstrate that there is electrical continuity through the antenna.
- Radiate a signal using an antenna or stub radiator at the highest measurement frequency of each antenna.
 - Tune the measurement receiver to the frequency of the applied signal and verify that a received signal of appropriate amplitude is present. Note: This evaluation is intended to provide a coarse indication that the antenna is functioning properly. There is no requirement to accurately measure the signal level.
- 2.4.6 Turn on the EUT and allow sufficient time for stabilization.
- 2.4.7 Using the measurement path of MIL-STD-461E Figure RE102-5, determine the radiated emissions from the EUT and its associated cabling.
- Scan the measurement receiver for each applicable frequency range, using the bandwidths and minimum measurement times in Table II.
 - Above 30 MHz, orient the antennas for both horizontally and vertically polarized fields.
 - Take measurements for each antenna position determined under MIL-STD-461E sub clause 5.16.3.3c(2)(c) above.

2.5 System Calibration Check


Based on MIL-STD-461E sub clause 5.16.3.4 system calibration requirement to verify the calibration level within ± 3 dB in all test frequency.

2.6 Test Result

The final test data is shown as following pages.




Job No.:	19A081601V	Polarization:	Horizontal
Standard:	MIL-STD-461E (1999)_RE102_Ground	Power Source:	DC 24 V
Test item:	Radiation Test	Date:	2019 / 9 / 5
Temp.(°C)/Hum.(%):	22.6(°C)/55%	Time:	下午 01:47:21
Company:	Perfectron Co., Ltd. Taiwan Branch	Engineer Signature:	Harvey Tsai
Trade Name:	Rugged Fanless computer	Distance:	1 m
Model:	SR800	RBW: 100kHz	VBW: 100kHz
Description:			

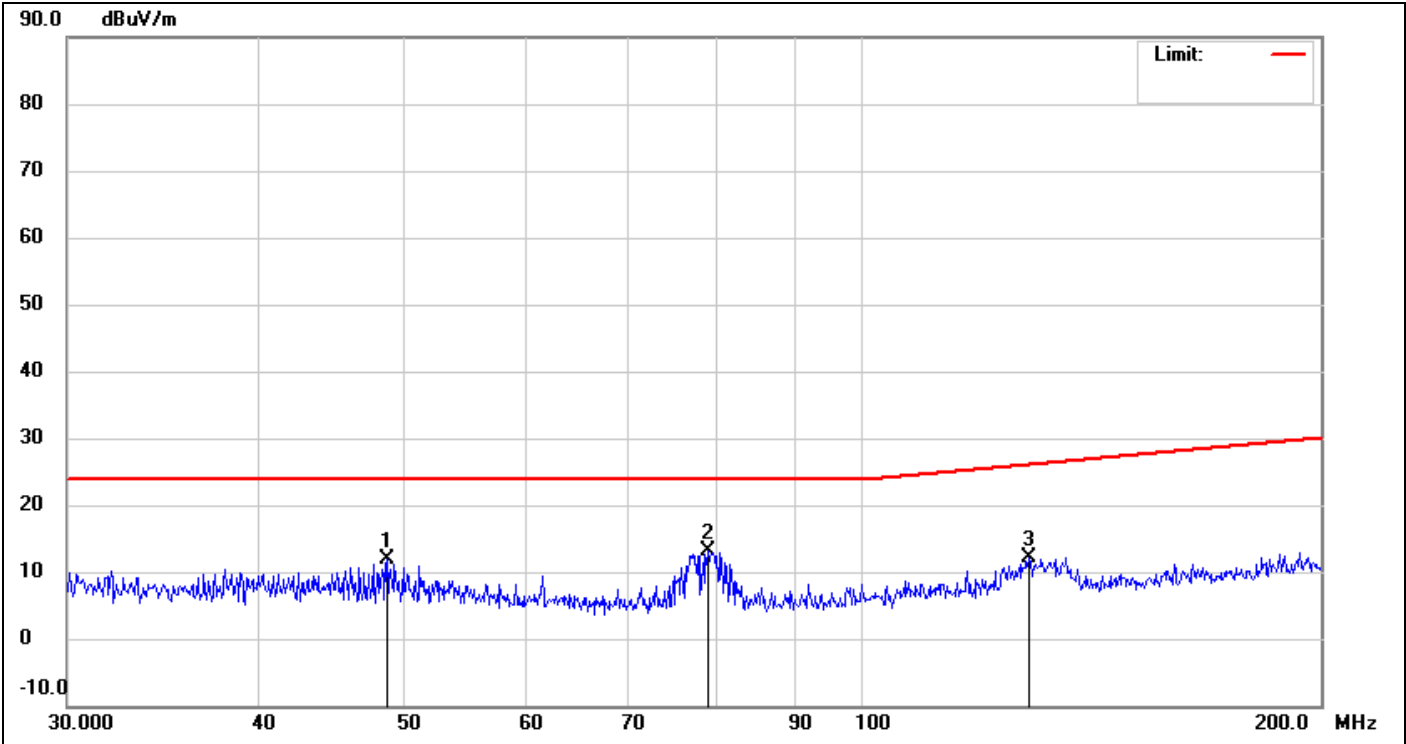

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	48.6651	41.39	-29.54	11.85	24.00	-12.15	peak	P	
2	79.0931	44.14	-31.04	13.10	24.00	-10.90	peak	P	
3	128.5462	40.80	-28.66	12.14	26.18	-14.04	peak	P	




Job No.:	19A081601V	Polarization:	Horizontal
Standard:	MIL-STD-461E (1999)_RE102_Ground	Power Source:	DC 24 V
Test item:	Radiation Test	Date:	2019 / 9 / 5
Temp.(°C)/Hum.(%):	22.6(°C)/55%	Time:	下午 02:08:13
Company:	Perfectron Co., Ltd. Taiwan Branch	Engineer Signature:	Harvey Tsai
Trade Name:	Rugged Fanless computer	Distance:	1 m
Model:	SR800	RBW: 100kHz	VBW: 100kHz
Description:			

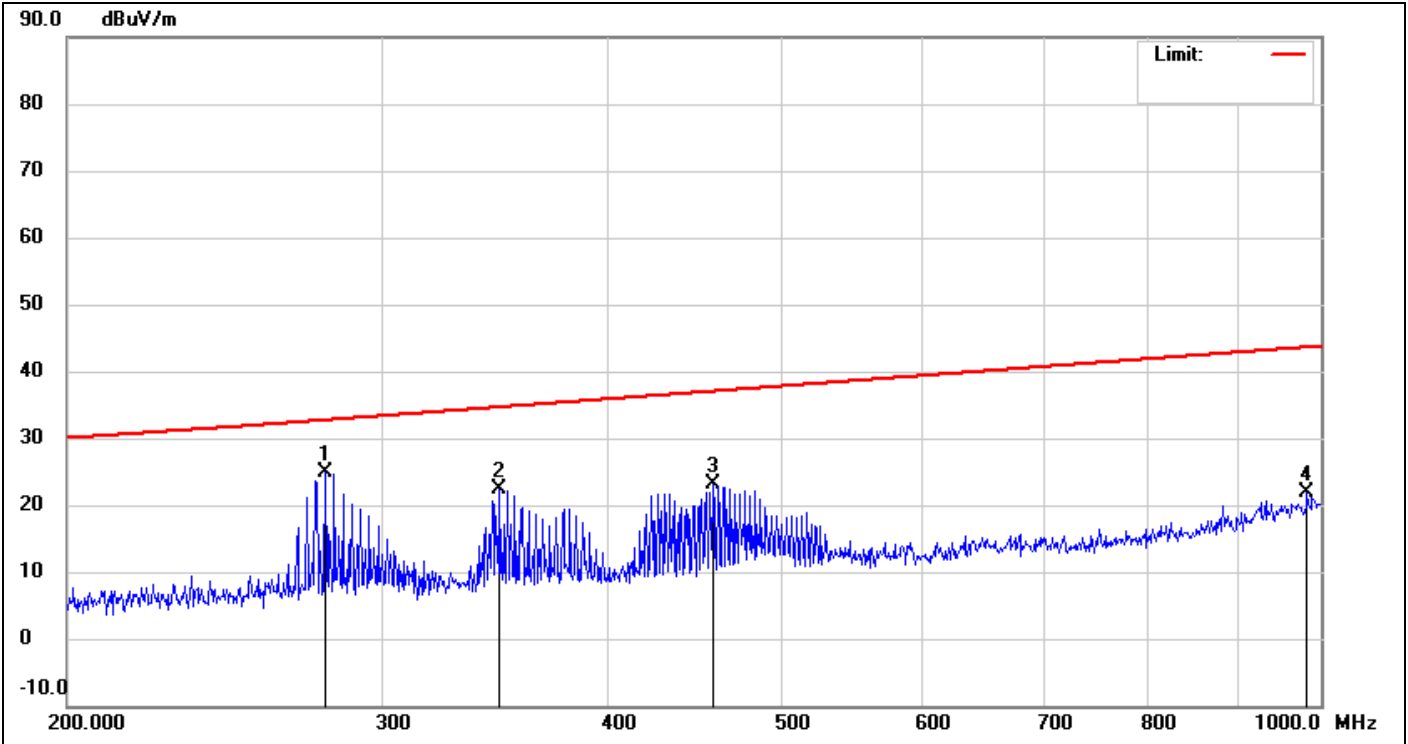

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	278.6235	52.66	-27.88	24.78	32.88	-8.10	peak	P	
2	348.4774	49.03	-26.60	22.43	34.82	-12.39	peak	P	
3	458.1414	47.88	-24.85	23.03	37.19	-14.16	peak	P	
4	982.4520	36.70	-14.87	21.83	43.80	-21.97	peak	P	




Job No.:	19A081601V	Polarization:	Horizontal
Standard:	MIL-STD-461E (1999)_RE102_Ground	Power Source:	DC 24 V
Test item:	Radiation Test	Date:	2019 / 9 / 5
Temp.(°C)/Hum.(%):	22.6(°C)/55%	Time:	下午 03:03:52
Company:	Perfectron Co., Ltd. Taiwan Branch	Engineer Signature:	Harvey Tsai
Trade Name:	Rugged Fanless computer	Distance:	1 m
Model:	SR800	RBW: 1000kHz	VBW: 1000kHz
Description:			

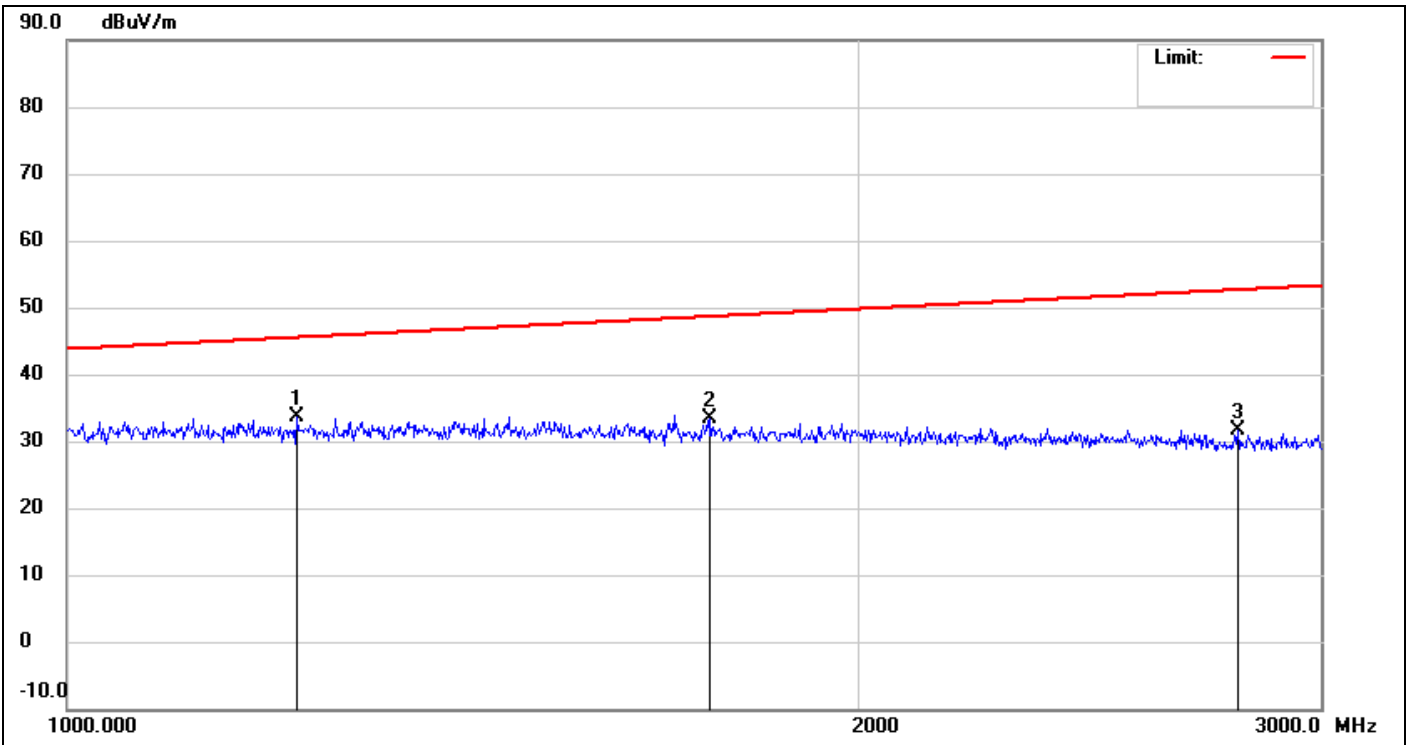

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	1222.6811	74.53	-40.78	33.75	45.69	-11.94	peak	P	
2	1756.9654	72.25	-38.94	33.31	48.83	-15.52	peak	P	
3	2790.1738	66.95	-35.35	31.60	52.84	-21.24	peak	P	




Job No.:	19A081601V	Polarization:	Horizontal
Standard:	MIL-STD-461E (1999)_RE102_Ground	Power Source:	DC 24 V
Test item:	Radiation Test	Date:	2019 / 9 / 5
Temp.(°C)/Hum.(%):	22.6(°C)/55%	Time:	下午 03:04:20
Company:	Perfectron Co., Ltd. Taiwan Branch	Engineer Signature:	Harvey Tsai
Trade Name:	Rugged Fanless computer	Distance:	1 m
Model:	SR800	RBW: 1000kHz	VBW: 1000kHz
Description:			

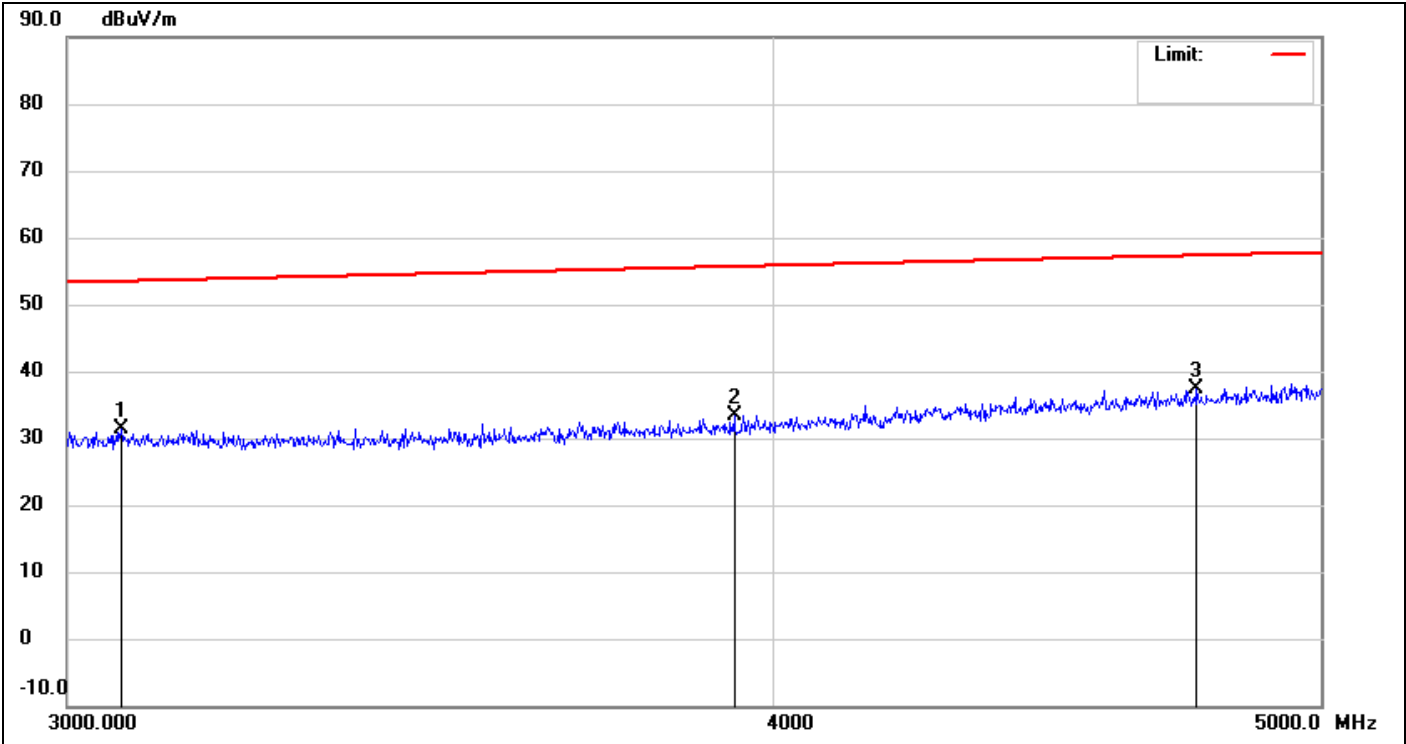

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	3066.6256	65.85	-34.48	31.37	53.66	-22.29	peak	P	
2	3936.8130	65.81	-32.41	33.40	55.83	-22.43	peak	P	
3	4753.4286	66.78	-29.39	37.39	57.46	-20.07	peak	P	




Job No.:	19A081601V	Polarization:	Horizontal
Standard:	MIL-STD-461E (1999)_RE102_Ground	Power Source:	DC 24 V
Test item:	Radiation Test	Date:	2019 / 9 / 5
Temp.(°C)/Hum.(%):	22.6(°C)/55%	Time:	下午 03:04:20
Company:	Perfectron Co., Ltd. Taiwan Branch	Engineer Signature:	Harvey Tsai
Trade Name:	Rugged Fanless computer	Distance:	1 m
Model:	SR800	RBW: 1000kHz	VBW: 1000kHz
Description:			

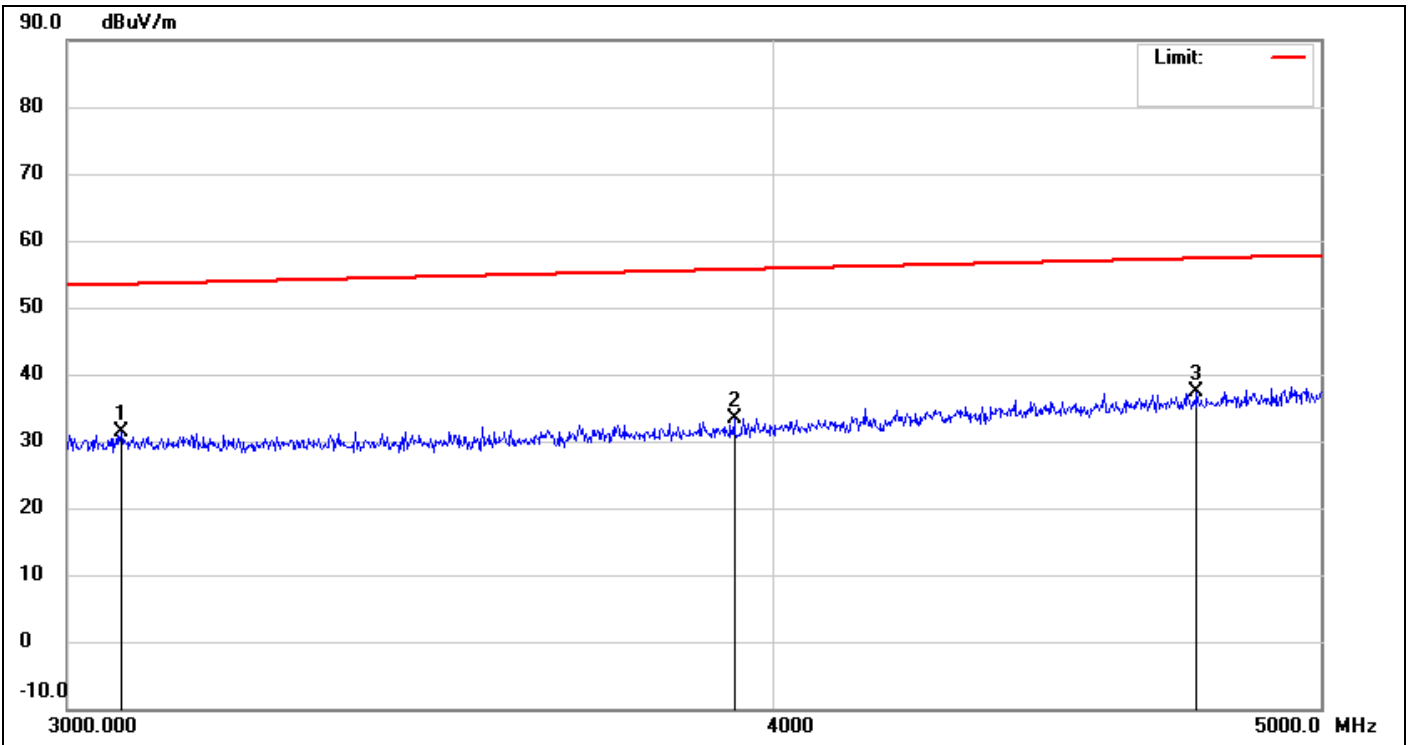

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	3066.6256	65.85	-34.48	31.37	53.66	-22.29	peak	P	
2	3936.8130	65.81	-32.41	33.40	55.83	-22.43	peak	P	
3	4753.4286	66.78	-29.39	37.39	57.46	-20.07	peak	P	




Job No.:	19A081601V	Polarization:	Vertical
Standard:	MIL-STD-461E (1999)_RE102_Ground	Power Source:	DC 24 V
Test item:	Radiation Test	Date:	2019 / 9 / 5
Temp.(°C)/Hum.(%):	22.6(°C)/55%	Time:	下午 01:46:01
Company:	Perfectron Co., Ltd. Taiwan Branch	Engineer Signature:	Harvey Tsai
Trade Name:	Rugged Fanless computer	Distance:	1 m
Model:	SR800	RBW: 100kHz	VBW: 100kHz
Description:			

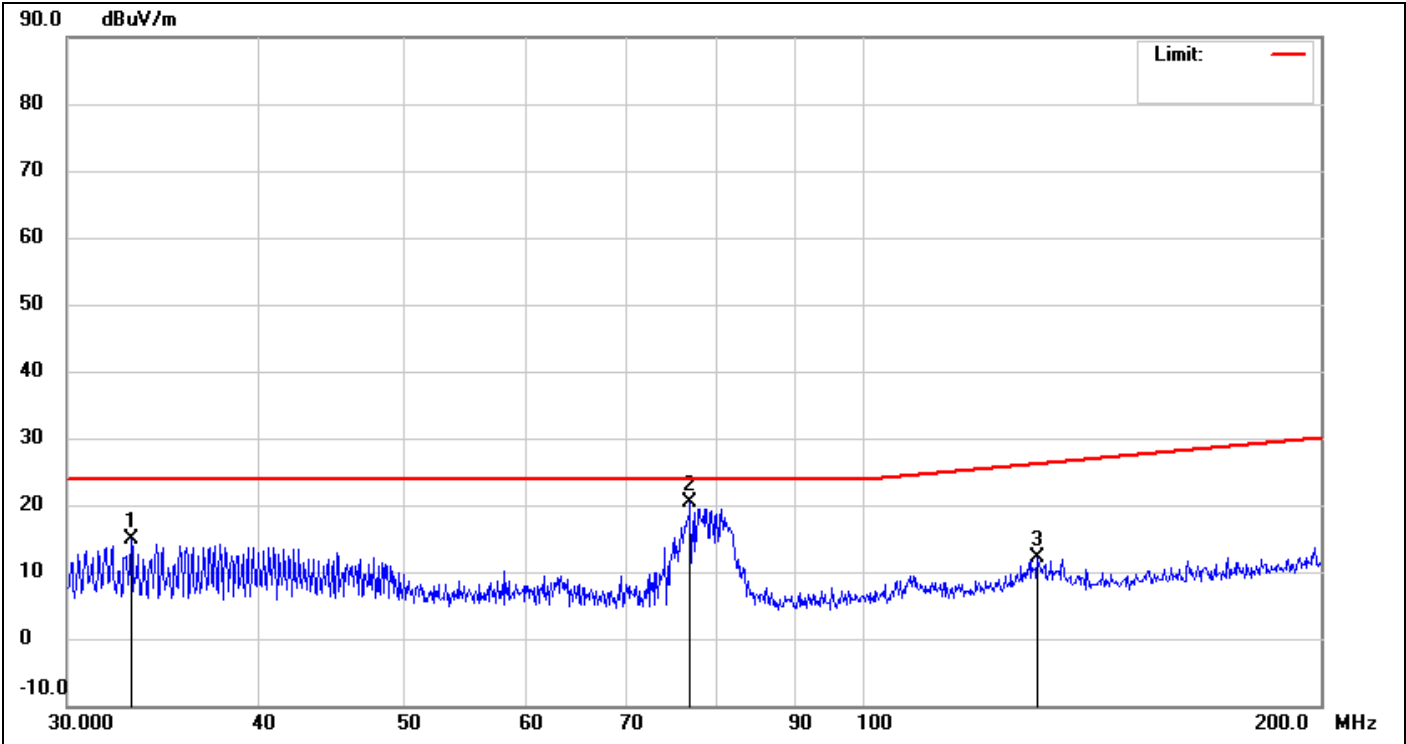

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	33.0477	44.19	-29.38	14.81	24.00	-9.19	peak	P	
2	77.0201	51.38	-31.03	20.35	24.00	-3.65	peak	P	
3	130.2647	40.81	-28.58	12.23	26.29	-14.06	peak	P	




Job No.:	19A081601V	Polarization:	Vertical
Standard:	MIL-STD-461E (1999)_RE102_Ground	Power Source:	DC 24 V
Test item:	Radiation Test	Date:	2019 / 9 / 5
Temp.(°C)/Hum.(%):	22.6(°C)/55%	Time:	下午 02:06:53
Company:	Perfectron Co., Ltd. Taiwan Branch	Engineer Signature:	Harvey Tsai
Trade Name:	Rugged Fanless computer	Distance:	1 m
Model:	SR800	RBW: 100kHz	VBW: 100kHz
Description:			

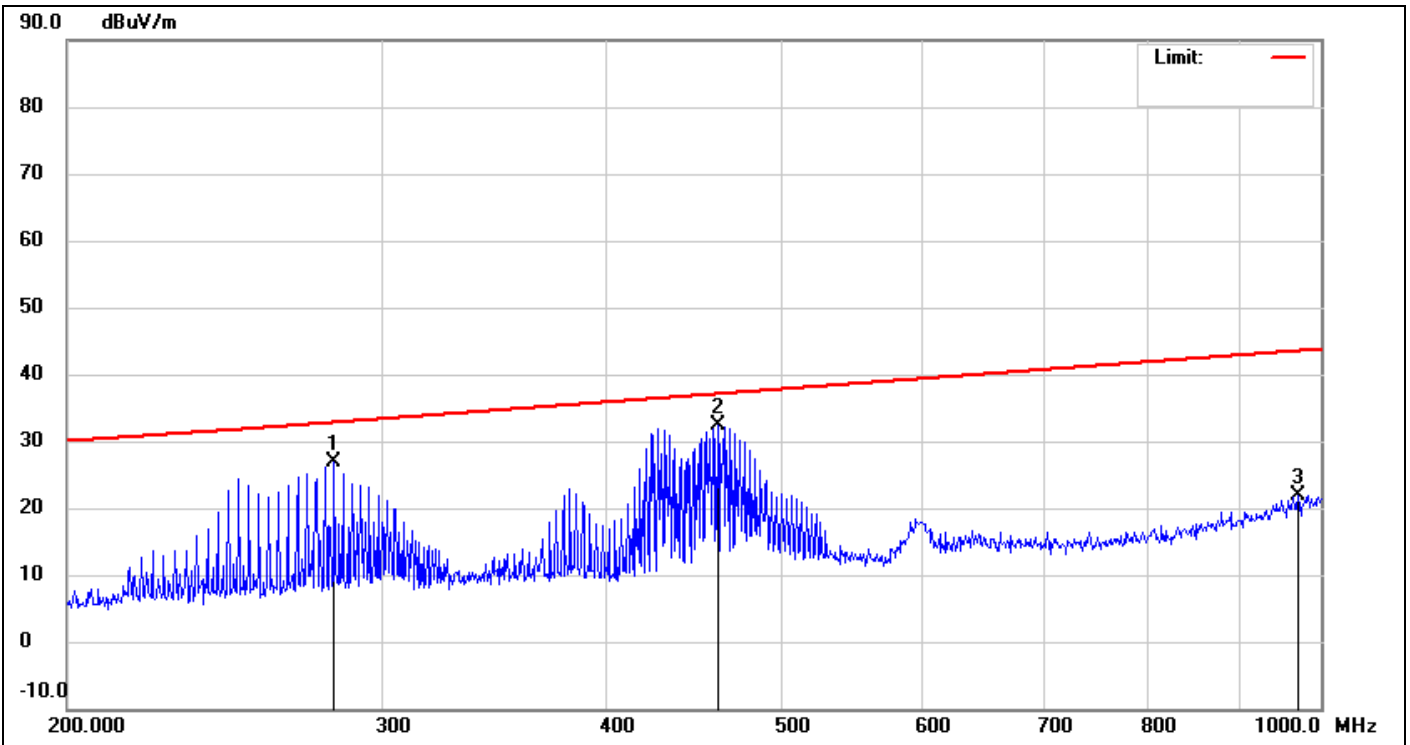

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	281.7803	54.60	-27.82	26.78	32.98	-6.20	peak	P	
2	461.1003	57.09	-24.66	32.43	37.24	-4.81	peak	P	
3	971.4457	37.06	-15.11	21.95	43.70	-21.75	peak	P	




Job No.:	19A081601V	Polarization:	Vertical
Standard:	MIL-STD-461E (1999)_RE102_Ground	Power Source:	DC 24 V
Test item:	Radiation Test	Date:	2019 / 9 / 5
Temp.(°C)/Hum.(%):	22.6(°C)/55%	Time:	下午 03:02:39
Company:	Perfectron Co., Ltd. Taiwan Branch	Engineer Signature:	Harvey Tsai
Trade Name:	Rugged Fanless computer	Distance:	1 m
Model:	SR800	RBW: 1000kHz	VBW: 1000kHz
Description:			

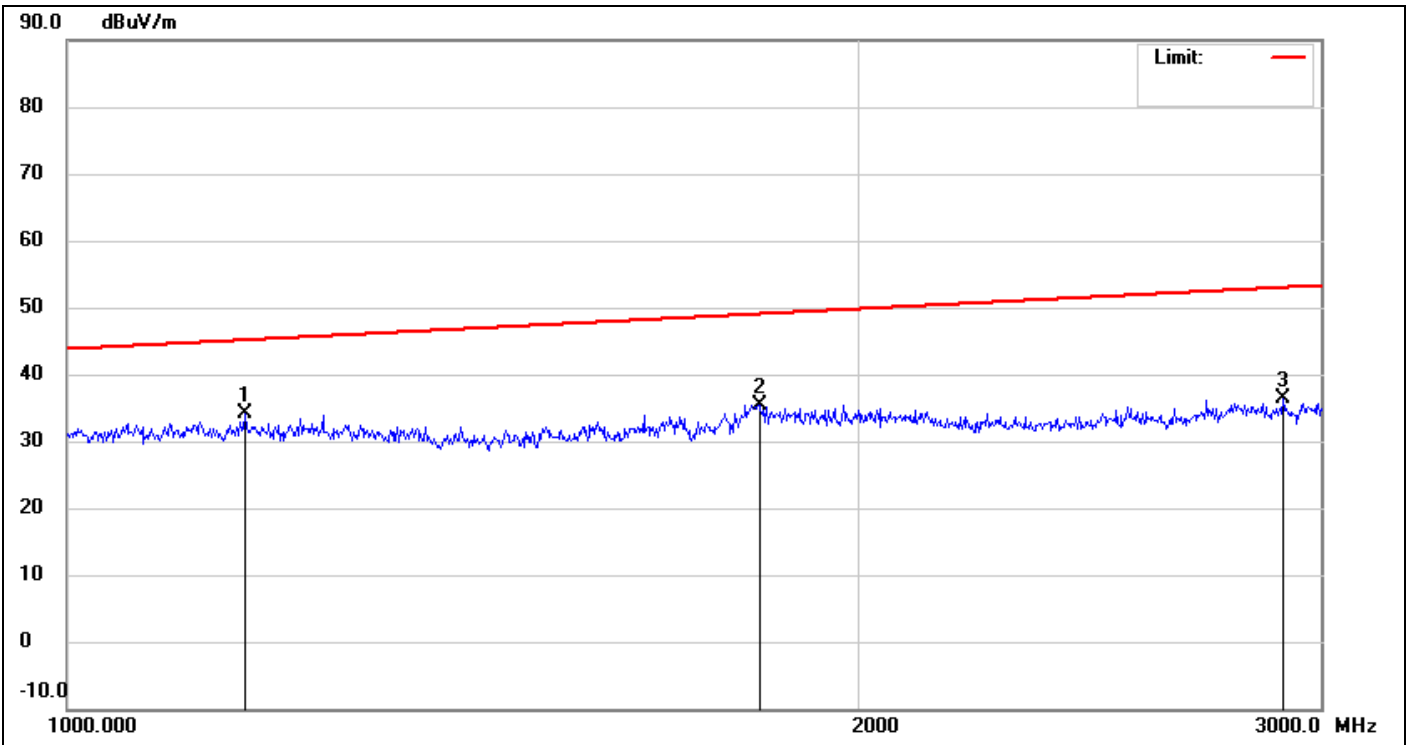

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	1168.8296	75.03	-40.99	34.04	45.30	-11.26	peak	P	
2	1833.8801	74.18	-38.69	35.49	49.21	-13.72	peak	P	
3	2902.7365	71.40	-34.93	36.47	53.18	-16.71	peak	P	



Job No.:	19A081601V	Polarization:	Vertical
Standard:	MIL-STD-461E (1999)_RE102_Ground	Power Source:	DC 24 V
Test item:	Radiation Test	Date:	2019 / 9 / 5
Temp.(°C)/Hum.(%):	22.6(°C)/55%	Time:	下午 03:01:33
Company:	Perfectron Co., Ltd. Taiwan Branch	Engineer Signature:	Harvey Tsai
Trade Name:	Rugged Fanless computer	Distance:	1 m
Model:	SR800	RBW: 1000kHz	VBW: 1000kHz
Description:			

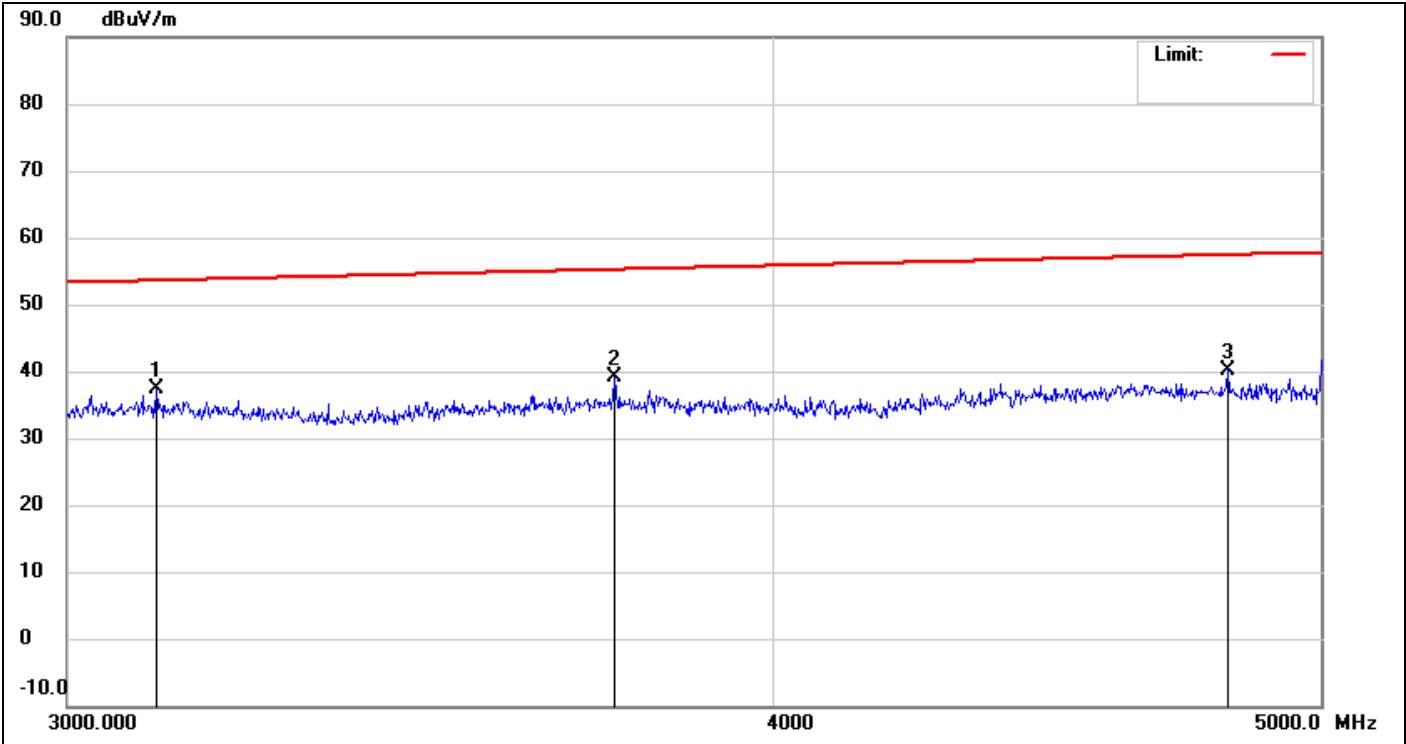

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	3110.8030	71.77	-34.41	37.36	53.78	-16.42	peak	P	
2	3750.3272	72.11	-33.01	39.10	55.41	-16.31	peak	P	
3	4814.5222	69.41	-29.16	40.25	57.57	-17.32	peak	P	




3 Radiated susceptibility, electric field Test (RS103)

3.1 Instrument

Instrument	Manufacturer	Model	Calibration Date	Next Cal. Date
Signal Generator	R&S	SMC100A	2019/05/26	2020/05/25
RF Power Amplifier	R&K	A080M102-5555R	N.C.R.	N.C.R.
RF Power Amplifier	R&K	A701M402-4747R	N.C.R.	N.C.R.
RF Power Amplifier	R&K	A009K251-5757R	N.C.R.	N.C.R.
Attenuator	SCHAFFNER	ATN6075	N.C.R.	N.C.R.
Horn Antenna	ETS-Lindgren	3106B	N.C.R.	N.C.R.
Horn Antenna	Schwarzbeck	BBHA 9120 E	N.C.R.	N.C.R.

Note: The above equipments are within the valid calibration period.

3.2 Block Diagram of Test Configuration

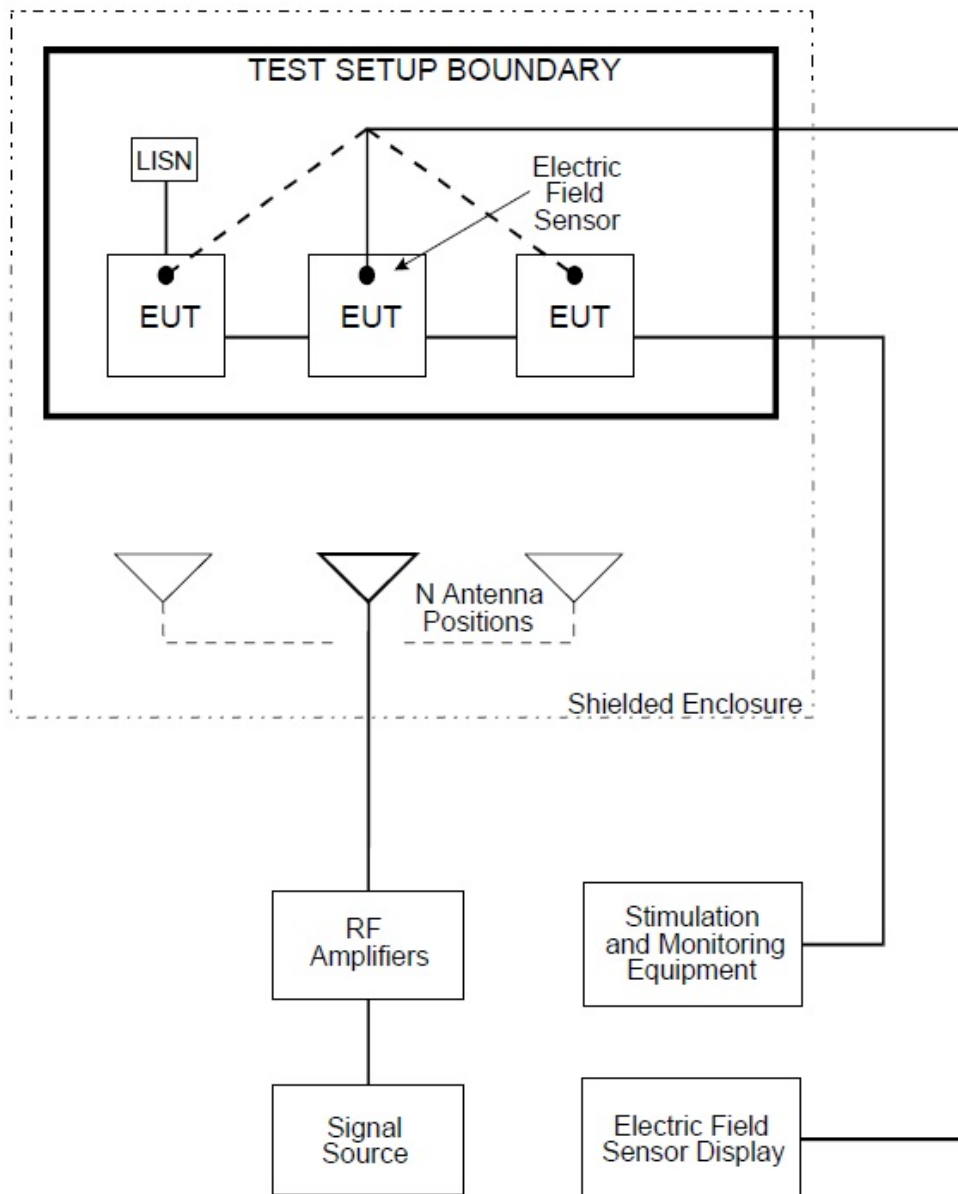



3.3 Test Limit

According to MIL-STD-461E sub clause 5.19.2 RS103 limit.

3.4 Configuration of Measurement

3.4.1 Turn on the measurement equipment and EUT and allow a sufficient time for stabilization.

3.4.2 Assess the test area for potential RF hazards and take necessary precautionary steps to assure safety of test personnel.

3.4.3 Calibration.

- (a) Electric field sensor procedure. Record the amplitude shown on the electric field sensor display unit due to EUT ambient. Reposition the sensor, as necessary, until this level is < 10% of the applicable field strength to be used for testing.
- (b) Receive antenna procedure (> 1 GHz), according to MIL-STD-461E sub clause 5.19.3.4 c. (2)(a)~(e).

3.4.4 EUT Testing.

- (a) E-Field sensor procedure.
 - Set the signal source to 1 kHz pulse modulation, 50% duty cycle, and using appropriate amplifier and transmit antenna, establish an electric field at the test start frequency. Gradually increase the electric field level until it reaches the applicable limit.
 - Scan the required frequency ranges in accordance with the rates and durations specified in Table III. Maintain field strength levels in accordance with the applicable limit. Monitor EUT performance for susceptibility effects.
- (b) Receive antenna procedure. According to MIL-STD-461E sub clause 5.19.3.4 d. (2)(a)~(c).
- (c) If susceptibility is noted, determine the threshold level in accordance with MIL-STD-461E sub clause 4.3.10.4.3 and verify that it is above the limit.
- (d) Perform testing over the required frequency range with the transmit antenna vertically polarized. Repeat the testing above 30 MHz with the transmit antenna horizontally polarized.
- (e) Repeat MIL-STD-461E sub clause 5.19.3.4d for each transmit antenna position required by MIL-STD-461E sub clause 5.19.3.3e.

3.5 Test Result

The final test data is shown as following pages.


**RS103 Test Data**

Applicant : Perfectron Co., Ltd. Taiwan Branch			Date of Measurement : 2019 / 09 / 17			
EUT : Rugged Fanless computer			Temp./Humidity/Atm.press. : 23.3°C / 50% / 998hPa			
M/N : SR800			Test Mode : Working Mode			
Input Voltage : DC 24 V			Test Engineer : Scott Chang			
Frequency Range (MHz)	Field Intensity (V/m)	Modulation	Antenna Polarity		Position	Results
			Horizontal	Vertical		
200-3200	50	PM 50%	○	○	X-axis	As in note
NOTE : <ul style="list-style-type: none">■ Run BurnIn H patten■ Monitoring method: Observe screen then record the phenomena. ■ Before the test: The screen shows image is in normal state.■ During the test: The screen shows image is in normal state.■ After the test: The screen shows image is in normal state.						




4 Photographs of Test


4.1 Conducted emissions, power leads Test (CE102)

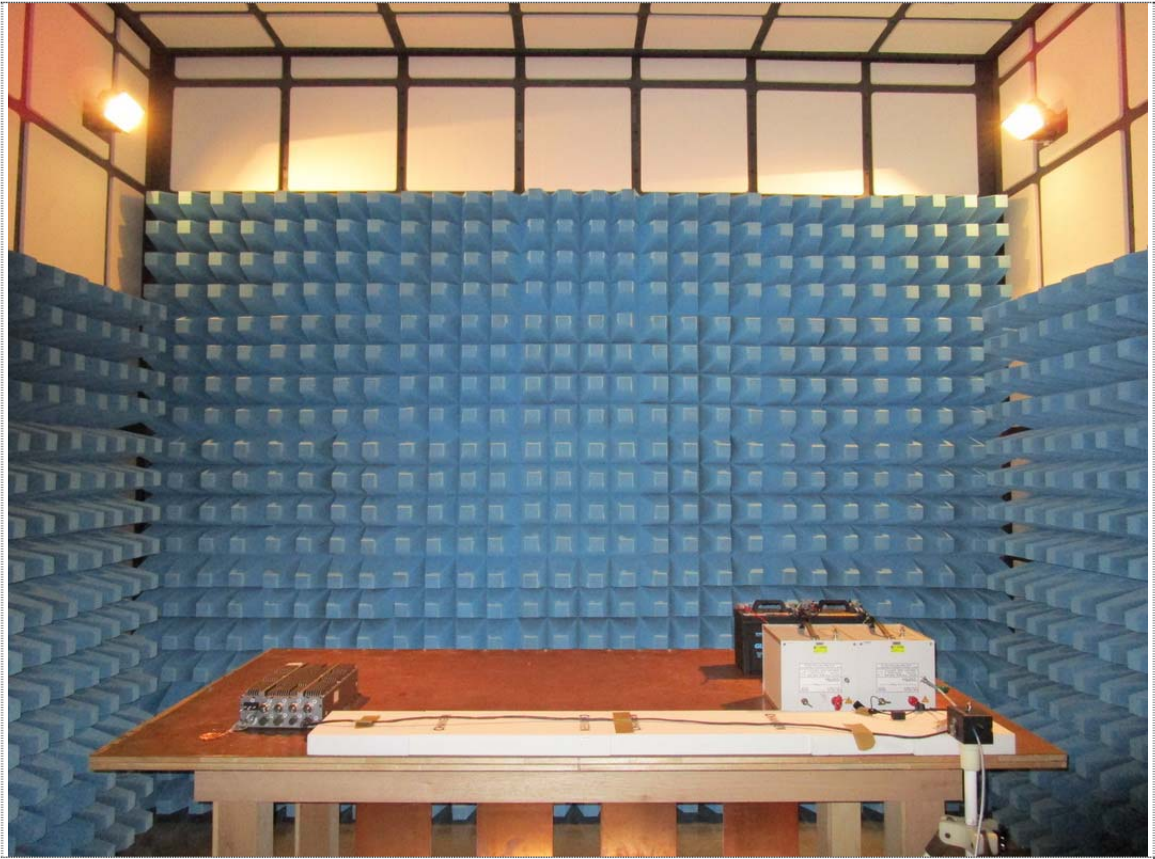


4.2 Radiated emissions, electric field Test (RE102)

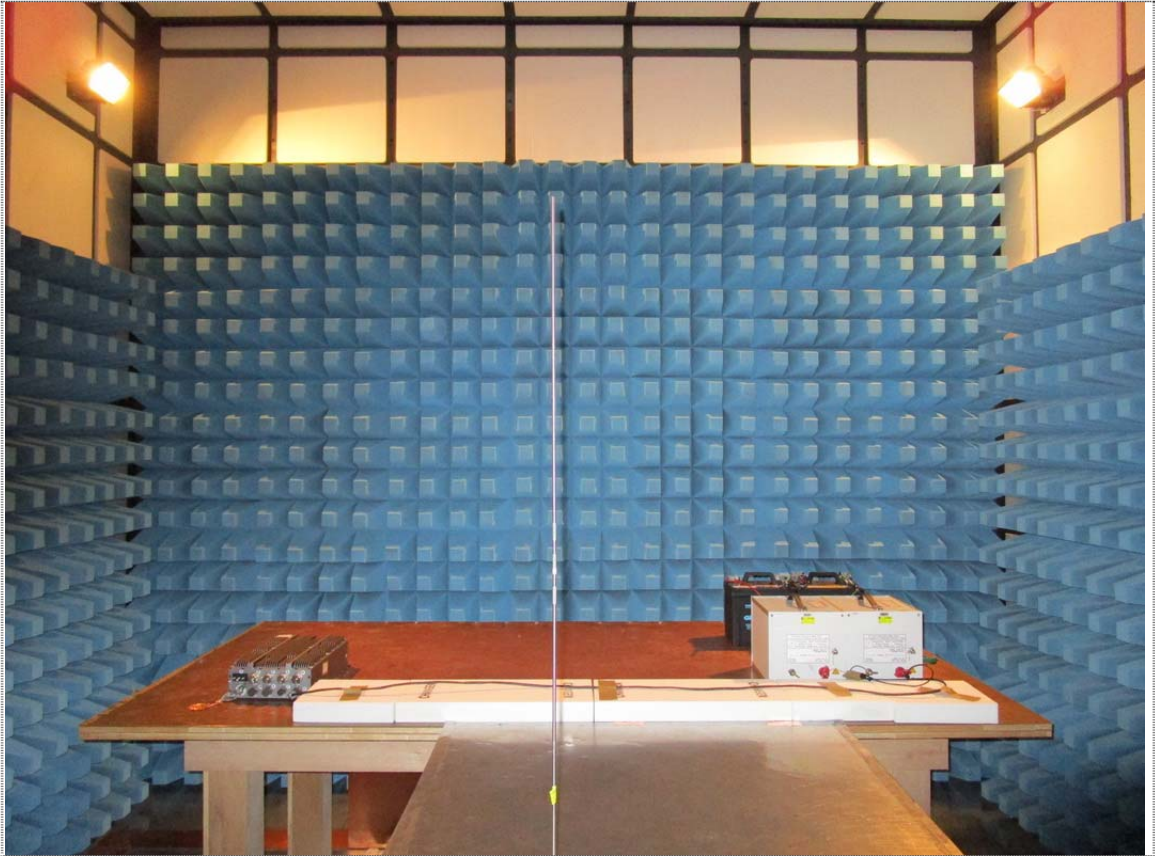


View of Measurement-1 (Monopole Antenna)

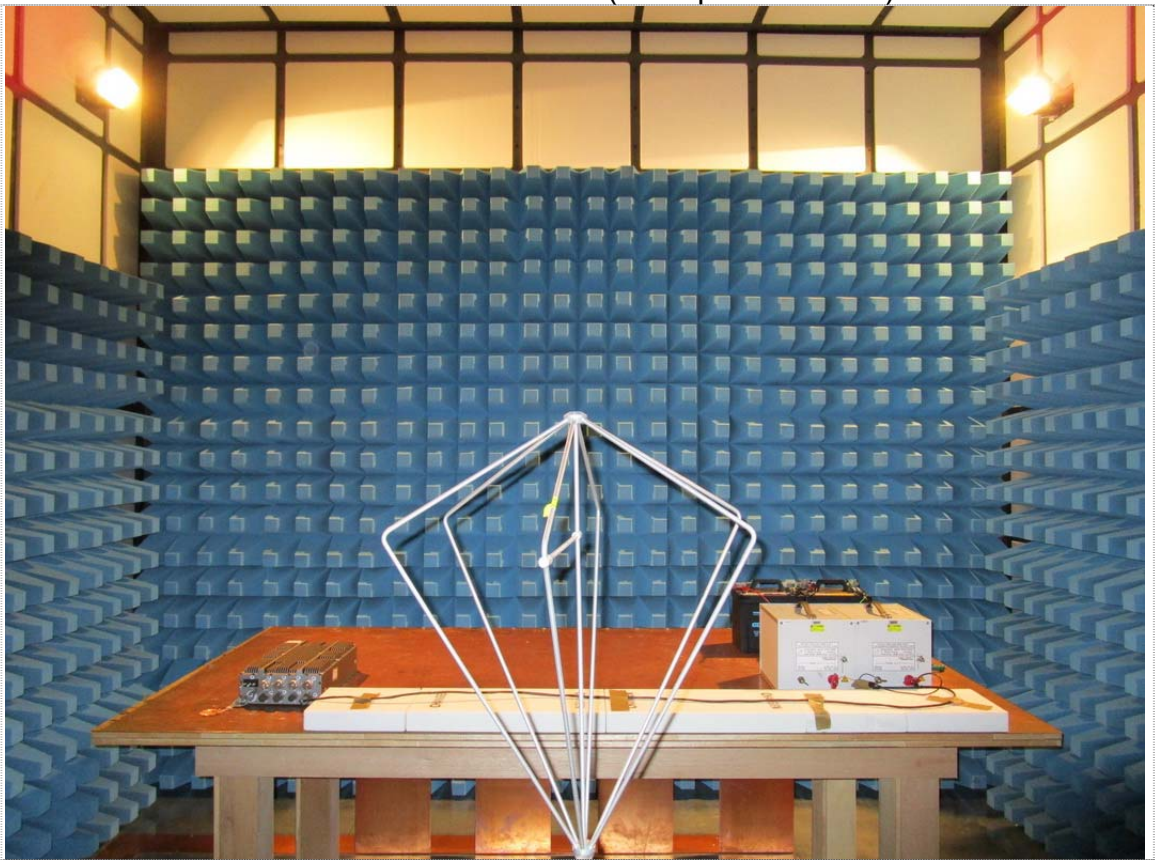

View of Measurement-2 (Biconical Antenna)

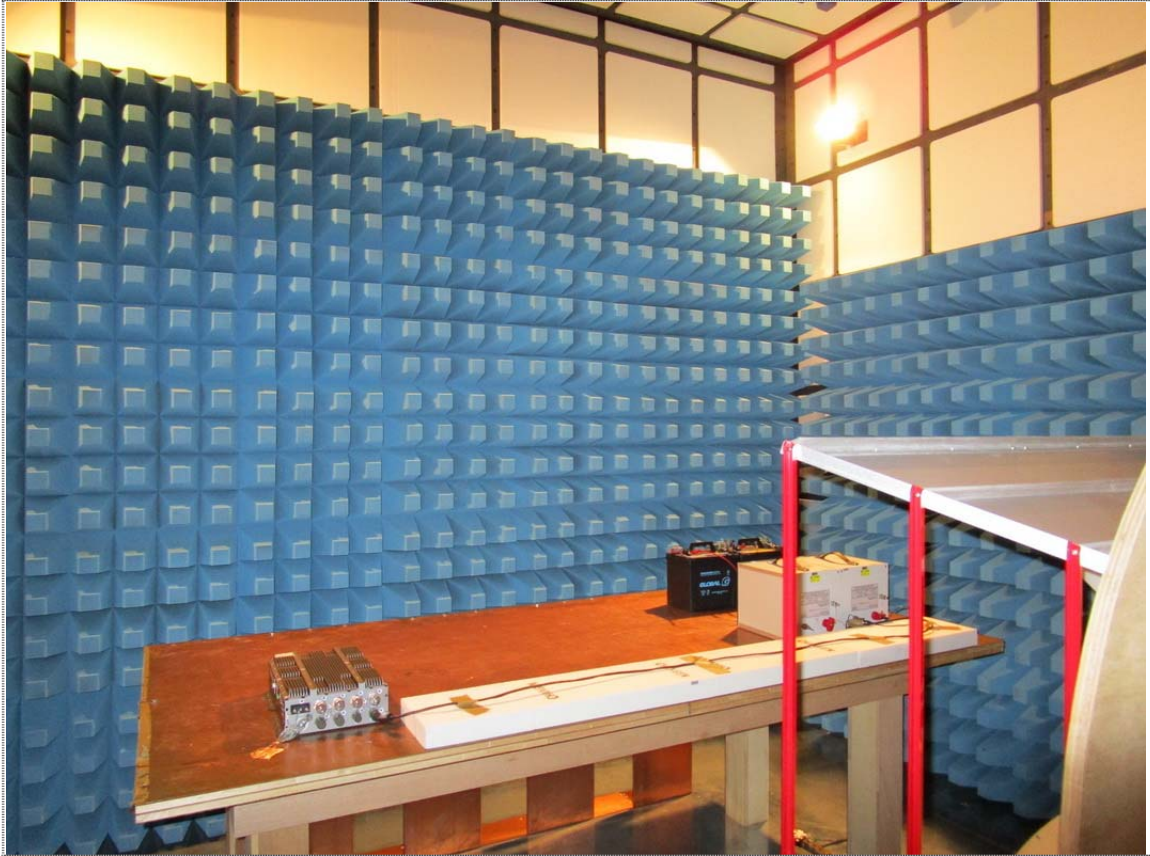


View of Measurement-3 (Log Antenna)

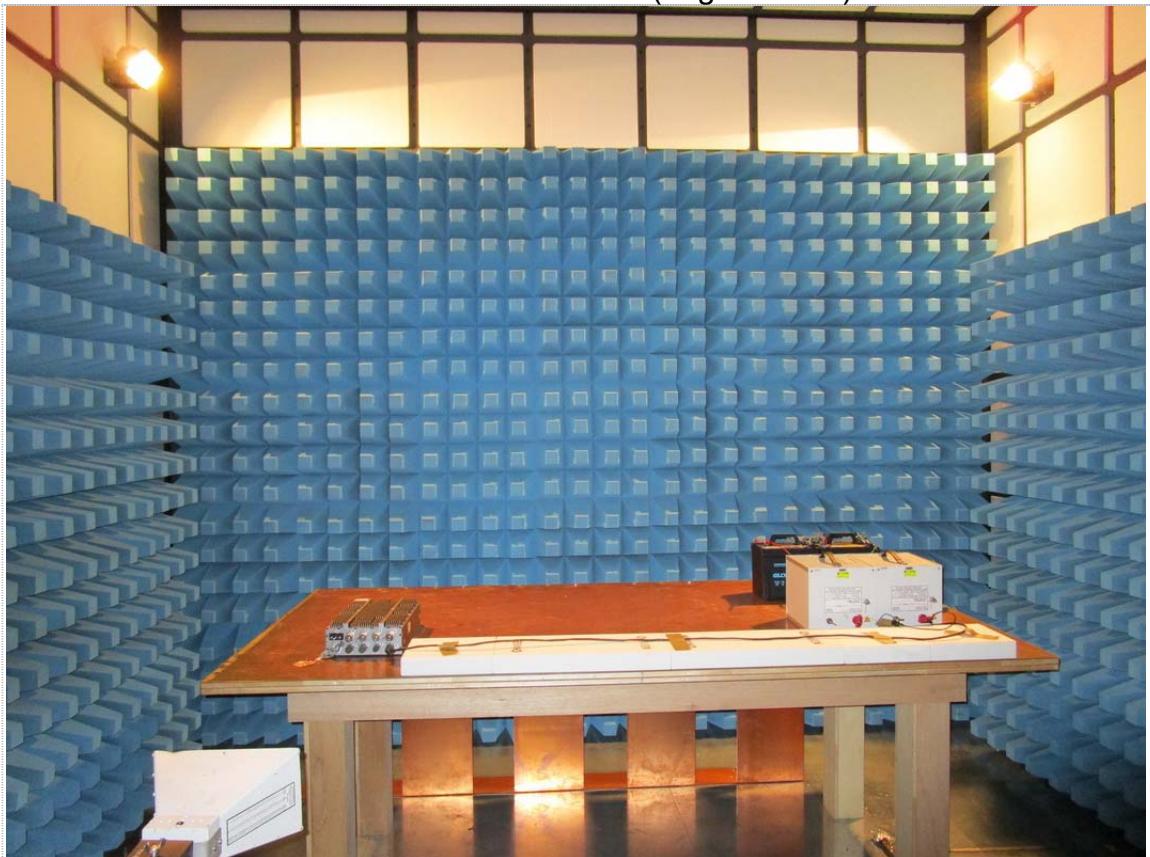


View of Measurement-4 (Horn Antenna)

4.3 Radiated susceptibility, electric field Test (RS103)

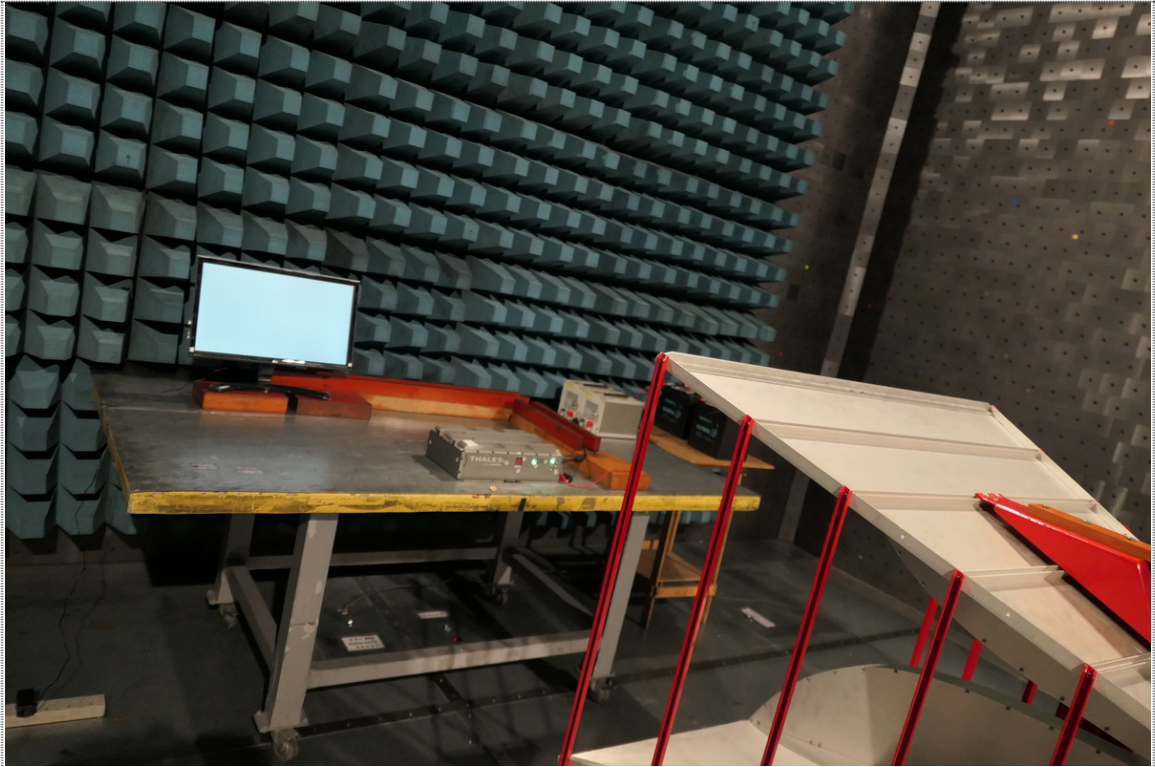

View of Measurement (Frequency 200 MHz - 1 GHz)

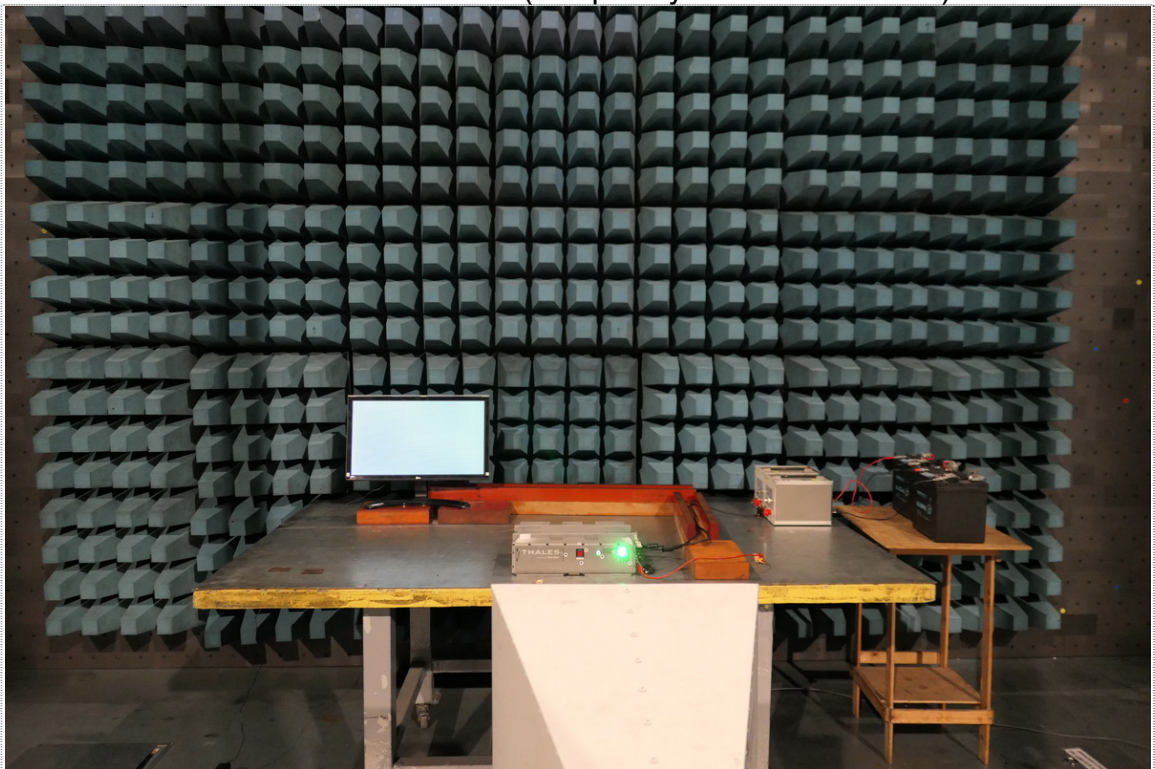

View of Measurement (Frequency 1 GHz - 3.2 GHz)



5 Photographs of EUT

5.1 Model No.: SR800



Front View of EUT



Rear View of EUT

附錄 1 : MIL-STD-461E (RS103) (Test by NCSIST LAB)

(RS103) Frequency Range: 1.5 MHz - 200 MHz

(RS103) Frequency Range: 3.0 GHz - 5.0 GHz



國家中山科學研究院
電磁相容試驗室

National Chung Shan Institute of Science & Technology
ElectroMagnetic Compatibility Laboratory

桃園龍潭郵政 90008 附 22 之 22 號信箱
P.O. Box No. 90008-22-22, Lung-Tan, Tao-Yuan, 325,
Taiwan, R.O.C.

TEL: 886-3-4712201
EXT: 359716、359726
FAX: 886-3-4716878

Doc. No.	EMCRPT-AT-108-053
Revision	A

Total pages (including this page): 24



Title :

Test Report for Rugged Fanless Computer

A P P L I C A N T	<p>Applicant: <u>Perfectron Co., Ltd. Taiwan Branch</u> Business Uniform No.: <u>53000789</u> TEL: <u>02-89118077 # 514</u> Address: <u>2F., No. 190, Sec. 2, Zhongxing Rd., Xindian Dist., New Taipei City 23146, Taiwan (R.O.C.)</u></p>
---	---

附註：

- 1.本報告內容以任何方式翻製或複印部份或全部者均無效。
This report should not be reproduced in part or in full by any means.
- 2.本報告僅對檢送樣品負責。
This report relates only to the item(s) tested.
- 3.本報告須加蓋本試驗室檢驗章及簽名始生效。
This report should be invalid without the examination stamp and signature of this institute.
- 4.樣品保存自簽發日起 30 天。
The tested item(s) will be retained for thirty days from the date issued.



國家中山科學研究院
電磁相容試驗室

National Chung Shan Institute of Science & Technology
ElectroMagnetic Compatibility Laboratory

桃園龍潭郵政 90008 附 22 之 22 號信箱
P.O. Box No. 90008-22-22, Lung-Tan, Tao-Yuan, 325,
Taiwan, R.O.C.

TEL: 886-3-4712201
EXT: 359716、359726
FAX: 886-3-4716878

TESTING REPORT

EQUIPMENT TYPE : Rugged Fanless Computer

MODEL NO. : SR800

MANUFACTURER : Perfectron Co., Ltd. Taiwan Branch

ADDRESS : 2F., No. 190, Sec. 2, Zhongxing Rd., Xindian
Dist., New Taipei City 23146, Taiwan (R.O.C.)

RECEIVED DATE : Sept. 18 , 2019

TESTED DATE : Sept. 18 , 2019

COMPLETED DATE : Sept. 18 , 2019

REFERENCE STD : MIL-STD-461E ,Ground Army

TEST METHOD : RS103 (1.5MHz~200MHz, 3GHz~5GHz)

INPUT POWER : DC 24V

PERIPHERY : Monitor: LG/22MP58VQ

VGA CABLE : With core & Shielding

POWER CORD : With core & Shielding (Reference to Page19
RS103 TEST (3) & RS103 TEST (4))

TEST RESULT : PASS (Reference to Section 7*)

APPLICANT : Perfectron Co., Ltd. Taiwan Branch

ADDRESS : 2F., No. 190, Sec. 2, Zhongxing Rd., Xindian
Dist., New Taipei City 23146, Taiwan (R.O.C.)

TESTED LAB : Electronic Systems Research Division, EMC
Lab., NCSIST

LAB LOCATION : Building W43, No.566, Ln. 134, Long-yuan
Rd., Long-tan Township, Tao-yuan Country
325, Taiwan (R.O.C.)

Tel.: +886-3-471-2201

EXT.: 359716, 359726

Fax.: +886-3-4716878

核准簽名：(報告簽署人/試驗室負責人)/日期

Approved Signature : (Report Signer /Chief of LAB.)

Shieh-Tsun Huang
2019.10.1

CONTENTS

Section	Title	Page
1.	SCOPE OF WORK	2
2.	TEST LABORATORY.....	2
3.	TEST PERIOD	2
4.	EQUIPMENT UNDER TEST	3
4.1	EQUIPMENT SUBMITTED FOR TESTS.....	3
4.2	MODES OF OPERATION	3
4.3	MODIFICATIONS DURING TESTING	4
5.	EVALUATION OF PERFORMANCE DURING THE TEST.....	4
5.1	CRITERIA OF ACCEPTANCE	4
6.	EMC TESTS.....	5
6.1	RS103.....	5
6.1.1	Test specification	5
6.1.2	Test Set-up	5
6.1.3	Test Procedures.....	8
7.	SUMMARY OF TEST RESULTS.....	10
8.	TEST FACILITIES AND INSTRUMENTS.....	11
9.	ATTACHMENT	12
9.1	TEST DATA.....	12
	RS103 DATA.....	12
9.2	PHOTOS OF EUT TEST SETUP	17
	RS103_TEST (1).....	17
	RS103_TEST (2).....	17
	RS103_TEST (3).....	18
	RS103_TEST (4).....	18
	EUT(1)	19
	EUT(2)	19
	EUT(3)	20
	EUT(4)	20
	EUT(5)	21
	EUT(6)	21
	EUT(7)	22

1. SCOPE OF WORK

The Rugged Fanless Computer, manufactured by Perfectron Co., Ltd. Taiwan Branch, has been tested Reference to the following specification:

◇ MIL-STD-461E, 20 August 1999, “ Requirements for the control of electromagnetic interference characteristics of subsystems and equipment ” applications for **RS103(1.5MHz~200MHz, 3GHz~5GHz)**.

2. TEST LABORATORY

The Rugged Fanless Computer was carried out in the EMC Laboratory at NCSIST, Tao Yuan, Taiwan, R.O.C.

Ambient conditions in the test site:

Parameter	Actual	Note
Temperature [°C]	22°C~24°C	
Relative Humidity [%RH]	53%~64%	

For details about the measurement facilities and instruments used, Please reference to Chapter 8.

3. TEST PERIOD

The Rugged Fanless Computer was received for test on 18 Sept. 2019, and then the test was completed on 18 Sept. 2019.

4. EQUIPMENT UNDER TEST

4.1 Equipment submitted for tests

Overall designation of system/product :


Item	Manufacturer	Model No.
EUT (Rugged Fanless Computer)	Perfectron Co., Ltd. Taiwan Branch	SR800


Hereafter the test sample is referred to as **EUT (Equipment Under Test)**.

4.2 Modes of operation

- (1) Except for power lead and VGA port, other I/O ports are not connected.
- (2) EUT is plugged into the power lead and VGA cable to perform functional tests.
- (3) Execute Burn in Test & H-pattern programs and monitor the test status from the screen.

The specified program is opened during the test. When the program is executed, the screen will display the code to start running. If the screen of the running program is blacked out or disappears, the determination fails.

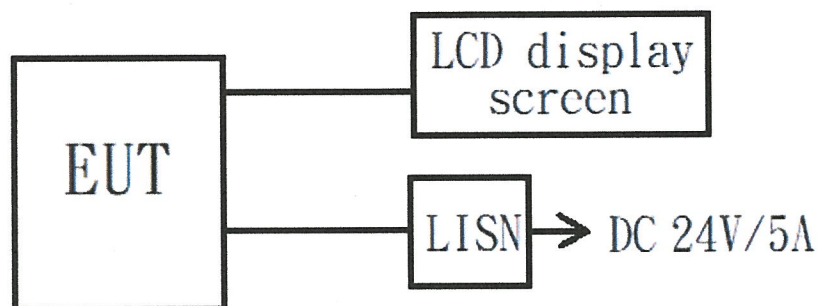

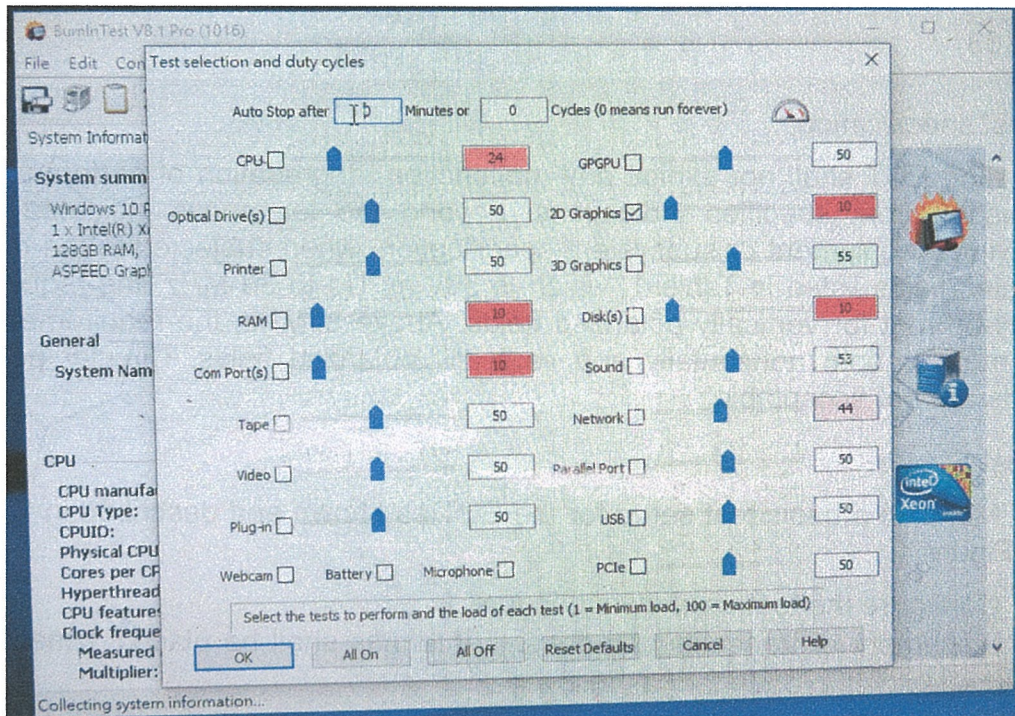

Note: The code is set to 2D Graphics and H-pattern is executed.

4.3 Modifications during testing

No modification of the EUT was made during the compliance test.

5. EVALUATION OF PERFORMANCE DURING THE TEST

5.1 Criteria of acceptance

To pass the test, the EUT shall meet the following criteria:

Emission tests:

- ◇ Comply with the emission limits given in the standard.

Susceptibility tests:

- ◇ Shall not exhibit any malfunction, degradation of performance, or deviation from specified indications, beyond the tolerances indicated in the individual equipment or subsystem specification.

6. EMC TESTS

6.1 RS103

6.1.1 Test specification

The EUT shall not exhibit any malfunction, degradation of performance, or deviation from specified indications, beyond the tolerances indicated in the individual equipment or subsystem specification, when subjected to the radiated electric fields listed in Table 1. which is 50V/m. Up to 30 MHz, the requirement shall be met for vertically polarized fields. Above 30MHz, the requirement shall be met for both horizontally and vertically polarized fields. Circular polarized fields are not acceptable.

6.1.2 Test Set-up

Maintain a basic test setup for the EUT as shown and described in Figure 3 and Figure 4.

Configure the test as shown in Figure 1.

- (1) Placement of transmits antennas. Antennas shall be placed 1 meter from the test setup boundary as follows:
 - (a) 1.5 MHz to 200 MHz: Test setup boundaries ≤ 3 meters. Center the antenna between the edges of the test setup boundary. The boundary includes all enclosures of the EUT and the 2 meters of exposed interconnecting and power leads. Interconnecting leads shorter than 2 meters are acceptable when they represent the actual platform installation.
 - (b) 200 MHz and above. Multiple antenna positions may be required as shown in Figure 2. Determine the number of antenna positions (N) as follows:
 - 1 For testing from 200 MHz up to 1GHz, place the antenna in a sufficient number of positions such that the entire width of each EUT enclosure and the first 35 cm of cables and leads interfacing with the EUT enclosure are within the 3 dB beam width of the antenna.
 - 2 For testing at 1 GHz and above, place the antenna in a sufficient number of positions such that the entire width of each EUT enclosure and the first 7 cm of cables and leads interfacing with the EUT enclosure are within the 3 dB beam width of the antenna.

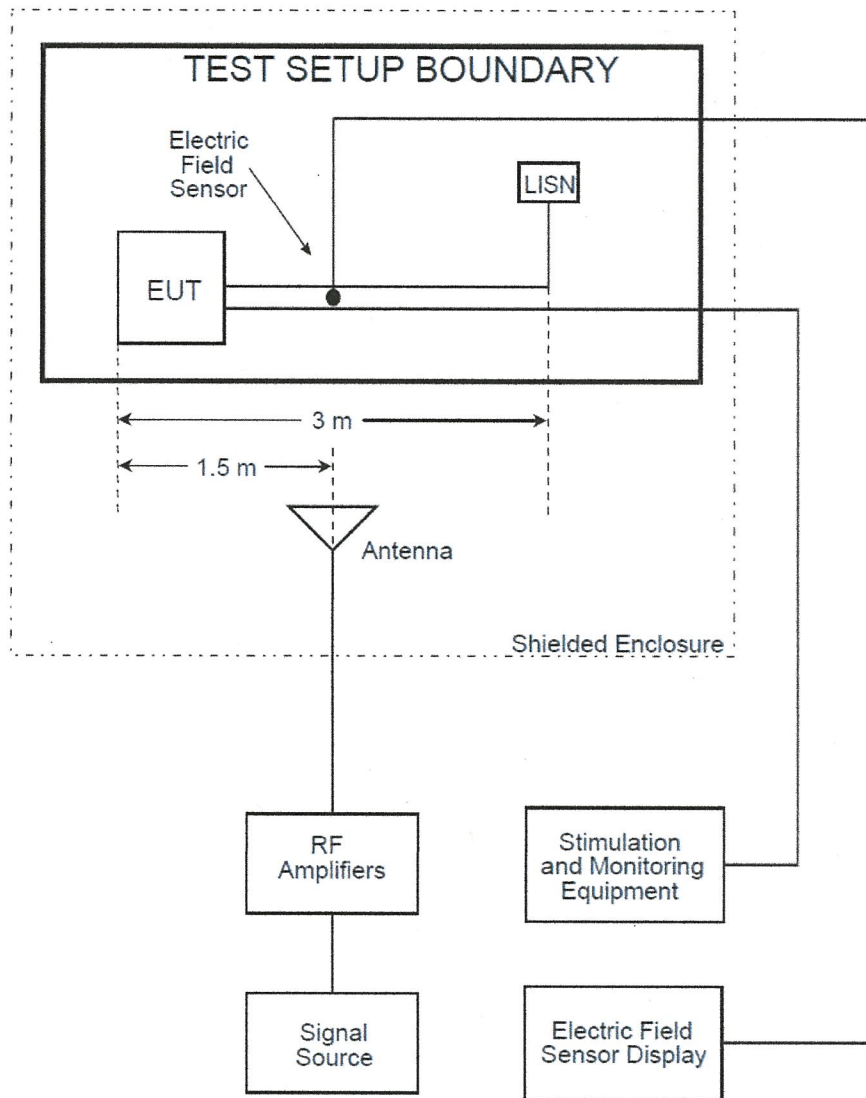


Figure 1. RS103 Test equipment configuration

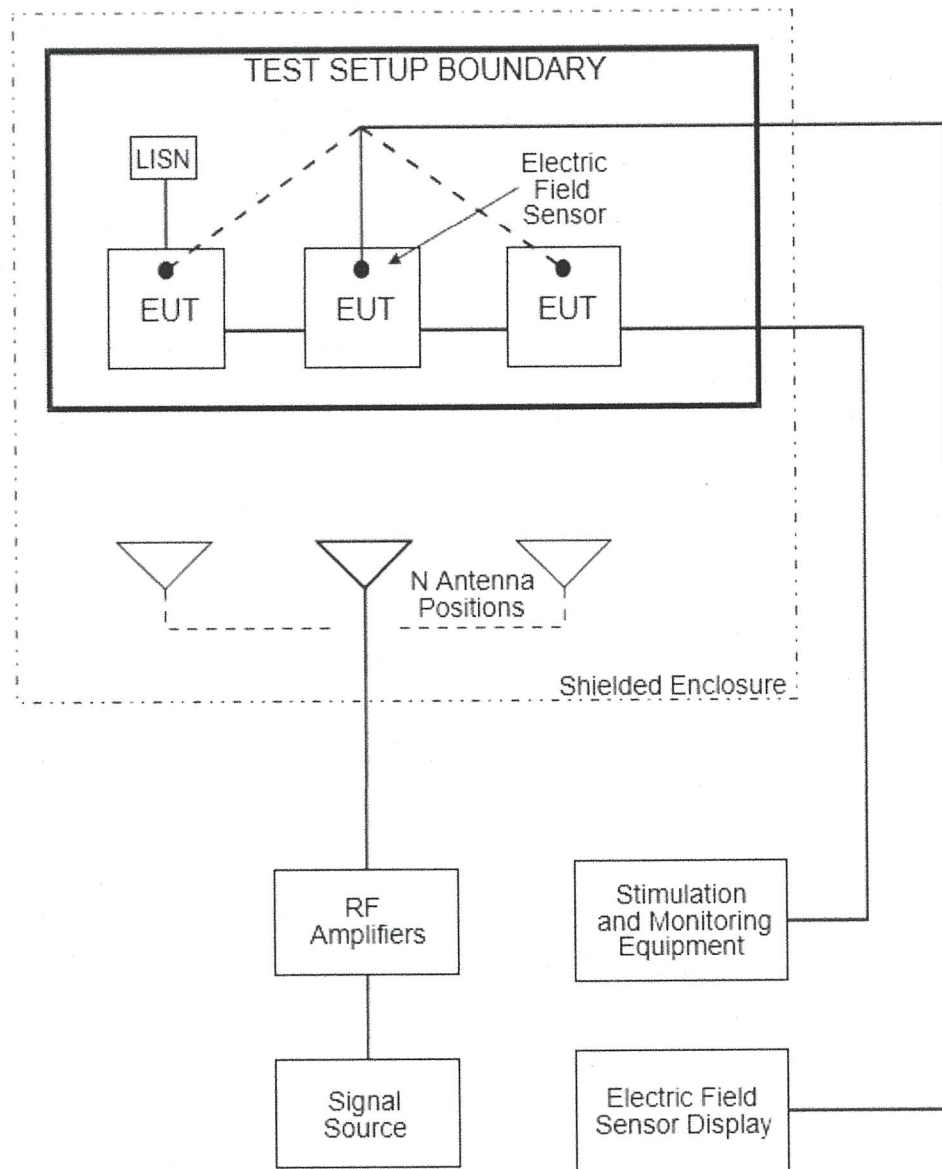


Figure 2. RS103 Multiple test antenna locations for frequency > 200 MHz.

6.1.3 Test Procedures

- (1) Turn on the measurement equipment and allow sufficient time for stabilization.
- (2) Set the signal source to 1 kHz pulse modulation, 50% duty cycle. Using an appropriate amplifier and transmit antenna, establish an electric field at the test start frequency. Gradually increase the input power level until it corresponds to the applicable level recorded during the calibration routine.
- (3) Scan the required frequency ranges in accordance with the rates and durations specified in Table 2 while assuring the correct transmitter input power is adjusted in accordance with the calibration data collected. Constantly monitor the EUT for susceptibility conditions.
- (4) If susceptibility is noted, determine the threshold level and verify that it is above the limit.
- (5) Perform testing over the required frequency range with the transmit antenna vertically polarized. Repeat the testing above 30MHz with the transmit antenna horizontally polarized.

Table 1. RS103 Test Limited Level

PLATFORM FREQ RANGE		LIMIT LEVEL (VOLTS/METER)							
		AIRCRAFT (EXTERNAL OR SAFETY CRITICAL)	AIRCRAFT INTERNAL	ALL SHIPS (ABOVE DECKS) AND SUBMARINES (EXTERNAL)*	SHIPS (METALLIC) (BELOW DECKS)	SHIPS (NON- METALLIC) (BELOW DECKS)	SUBMARINES (INTERNAL)	GROUND	SPACE
2 MHz ↓ 30 MHz	A	200	200	200	10	50	5	50	20
	N	200	200	200	10	50	5	10	20
	AF	200	20	-	-	-	-	10	20
30 MHz ↓ 1 GHz	A	200	200	200	10	10	10	50	20
	N	200	200	200	10	10	10	10	20
	AF	200	20	-	-	-	-	10	20
1 GHz ↓ 18 GHz	A	200	200	200	10	10	10	50	20
	N	200	200	200	10	10	10	50	20
	AF	200	60	-	-	-	-	50	20
18 GHz ↓ 40 GHz	A	200	200	200	10	10	10	50	20
	N	200	60	200	10	10	10	50	20
	AF	200	60	-	-	-	-	50	20

KEY: A = Army
N = Navy
AF = Air Force

* For equipment located external to the pressure hull of a submarine but within the superstructure, use SHIPS (METALLIC)(BELOW DECKS)

Table 2. Susceptibility Scanning

Frequency Range	Analog Scans Maximum Scan Rates	Stepped Scans Maximum Step Size
30Hz - 1MHz	$0.0333 f_0 / \text{sec}$	$0.05 f_0$
1MHz~30MHz	$0.00667 f_0 / \text{sec}$	$0.01 f_0$
30MHz~1GHz	$0.00333 f_0 / \text{sec}$	$0.005 f_0$
1GHz~8GHz	$0.000667 f_0 / \text{sec}$	$0.001 f_0$
8GHz~40GHz	$0.000333 f_0 / \text{sec}$	$0.0005 f_0$

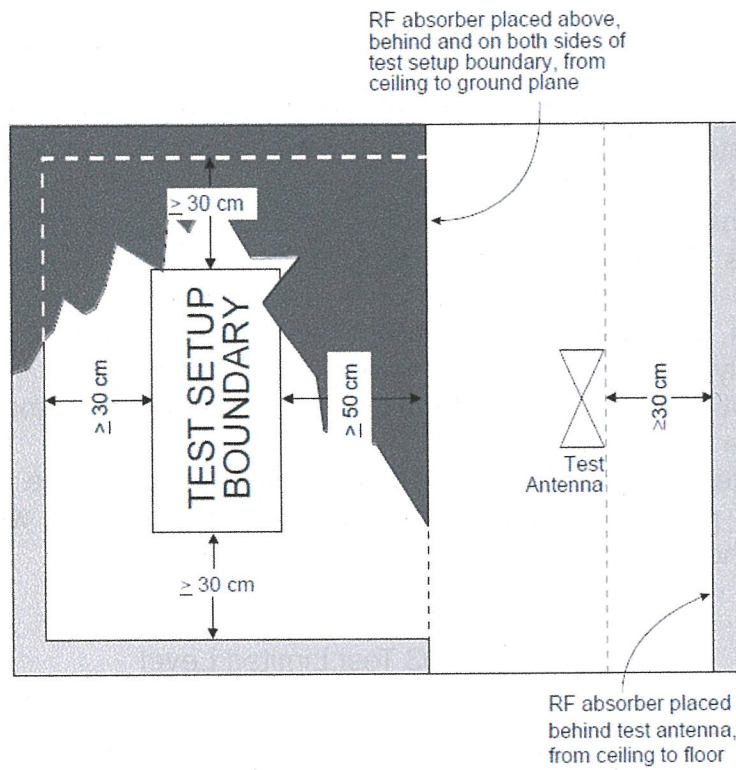


Figure 3. Typical Test Setup in RF Absorber Loading Chamber

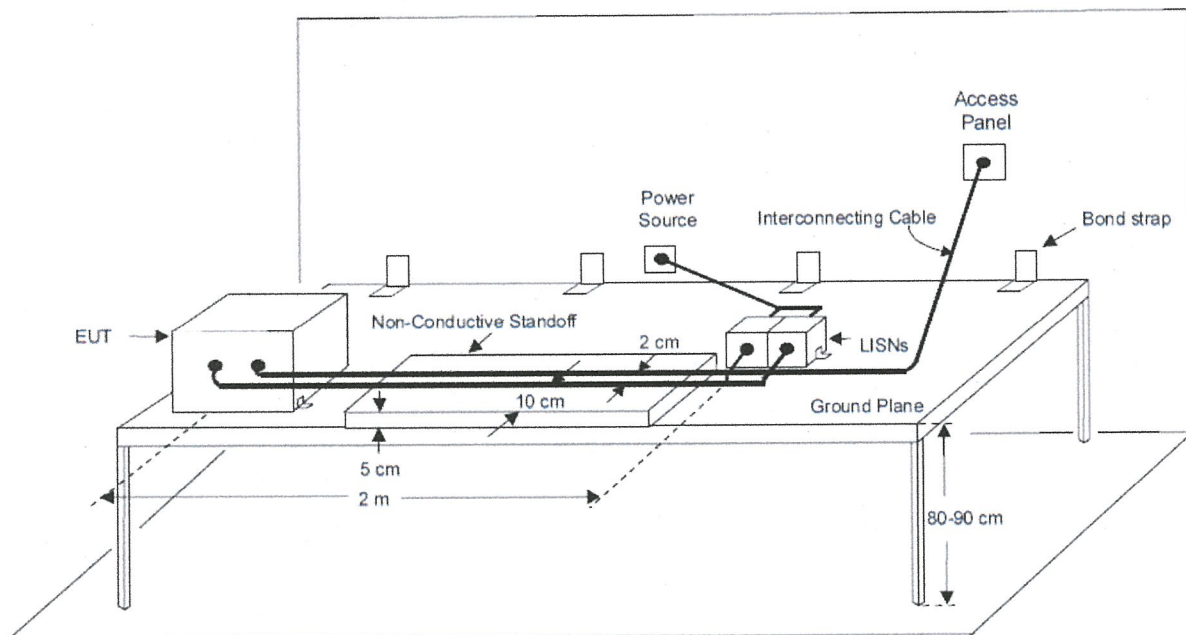


Figure 4. General Test Setup

7. SUMMARY OF TEST RESULTS

The Rugged Fanless Computer, manufactured by Perfectron Co., Ltd. Taiwan Branch, has been tested reference to the following specification:

Test Item	Description	Test Specification	Test Result
MIL-STD-461E, 20 August 1999, Requirements For The Control of Electromagnetic Interference Characteristics of Subsystems and Equipment.			
RS103	Radiated Susceptibility, Electric Field, 2 MHz to 40 GHz	1.5MHz~200MHz, 50 V/m 3GHz~5GHz, 50 V/m	*PASS

*RS103 test specification based on MIL-STD-461E shall be tested from 2MHz to 40GHz. The applicant's requirement is only from 1.5MHz to 200MHz and 3GHz to 5GHz.

8. TEST FACILITIES AND INSTRUMENTS

The following test facilities and instruments were used during the tests:

Instrument	Manufacturer	Model #	Serial #
RS103			
Computer	HP	L1G77AV	U11794
Susceptibility S/W	CSIST	MEMC	N/A
Antenna	AR	AT3000	303961
Antenna	EMCO	Biconical 3109	91042543
Antenna	EMCO	Horn 3115	9312-4196
Signal generation	Agilent	N5183A	MY49060306
E-field Monitor	AR	FM7004	9209-1197
Field-Sensor	AR	FP7040	0342955
Amplifier	AR	2500A225	0464728
Amplifier	AR	500T2G8	322407

9. ATTACHMENT


9.1 Test Data

RS103:

Vertical Polarization (1.5MHz to 30MHz):

MIL-STD-461E RS103 Test Report


RS103 Test information	Meteorological information
EUT Name: Rugged Fanless Computer SR800	Temperature(°C): 24
Test date: 2019/9/18	Humidity(%): 53
Test time: 下午 05:54	Operator: Wang, Chen-Chien
Test mode:	
Polarization: Vertical	
Limit Level: 50V/m	
Modulation: 1k Hz Pulse modulation, 50% duty cycle.	

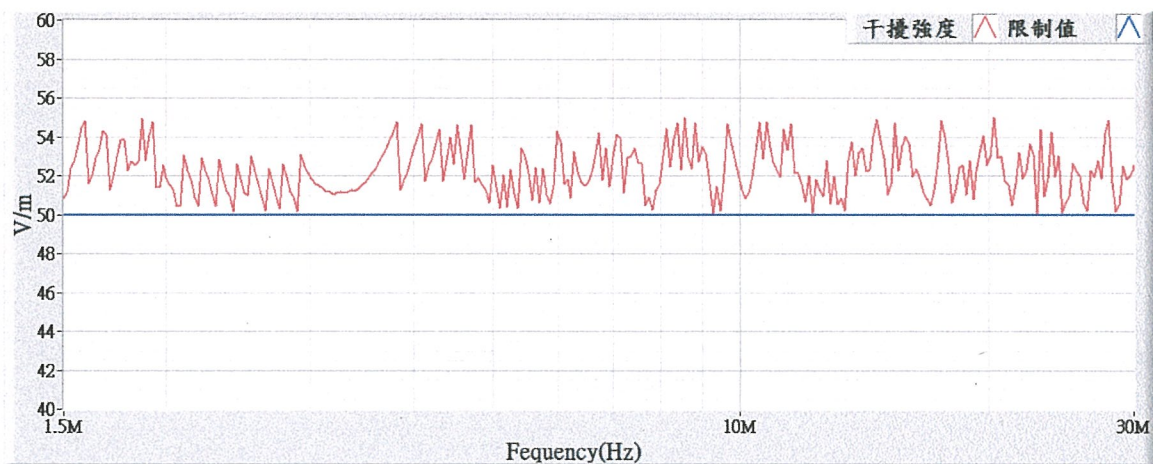

Horizontal Polarization (30MHz to 200MHz):

MIL-STD-461E RS103 Test Report


RS103 Test information	Meteorological information
EUT Name: Rugged Fanless Computer SR800	Temperature(°C): 24
Test date: 2019/9/18	Humidity(%): 53
Test time: 下午 05:18	Operator: Wang, Chen-Chien
Test mode:	
Polarization: Horizontal	
Limit Level: 50V/m	
Modulation: 1k Hz Pulse modulation, 50% duty cycle.	

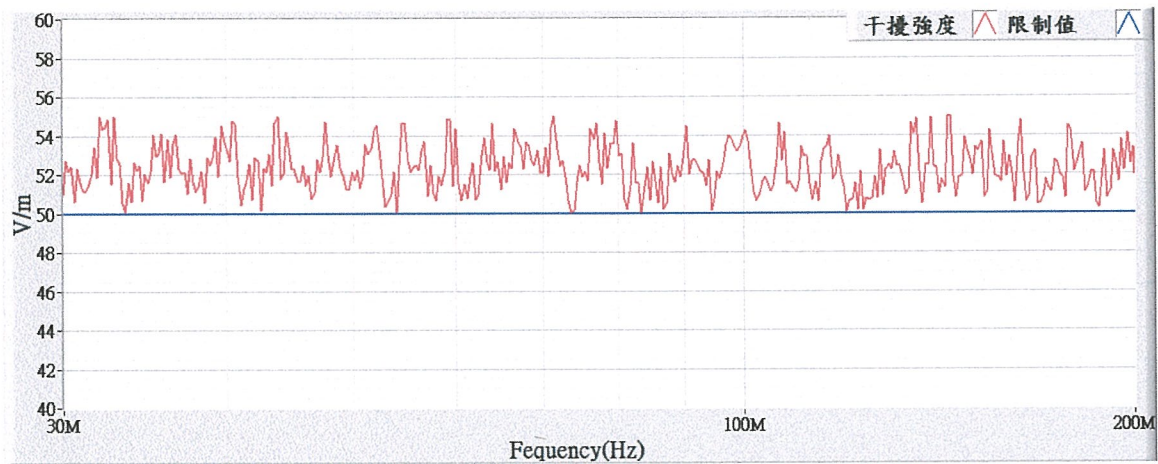

Vertical Polarization (30MHz to 200MHz):

MIL-STD-461E RS103 Test Report


RS103 Test information	Meteorological information
EUT Name: Rugged Fanless Computer SR800	Temperature(°C): 24
Test date: 2019/9/18	Humidity(%): 53
Test time: 下午 04:14	Operator: Wang, Chen-Chien
Test mode:	
Polarization: Vertical	
Limit Level: 50V/m	
Modulation: 1k Hz Pulse modulation, 50% duty cycle.	

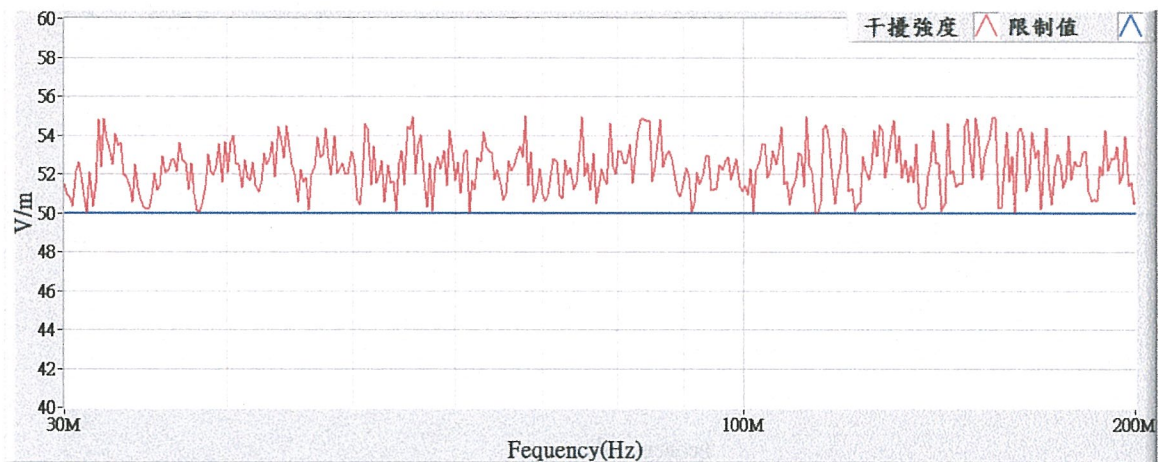

Horizontal Polarization (3GHz to 5GHz):

MIL-STD-461E RS103 Test Report


RS103 Test information	Meteorological information
EUT Name: Rugged Fanless Computer SR800	Temperature(°C): 22
Test date: 2019/9/18	Humidity(%): 64
Test time: 下午 03:25	Operator: Wang, Chen-Chien
Test mode:	
Polarization: Horizontal	
Limit Level: 50V/m	
Modulation: 1k Hz Pulse modulation, 50% duty cycle.	

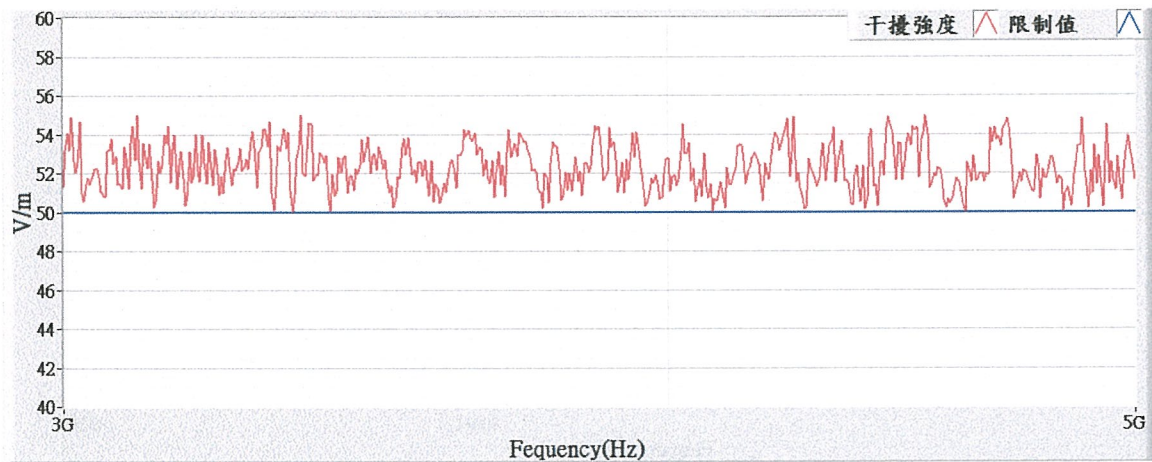

Vertical Polarization (3GHz to 5GHz):

MIL-STD-461E RS103 Test Report


RS103 Test information	Meteorological information
EUT Name: Rugged Fanless Computer SR800	Temperature(°C): 22
Test date: 2019/9/18	Humidity(%): 64
Test time: 下午 02:36	Operator: Wang, Chen-Chien
Test mode:	
Polarization: Vertical	
Limit Level: 50V/m	
Modulation: 1k Hz Pulse modulation, 50% duty cycle.	

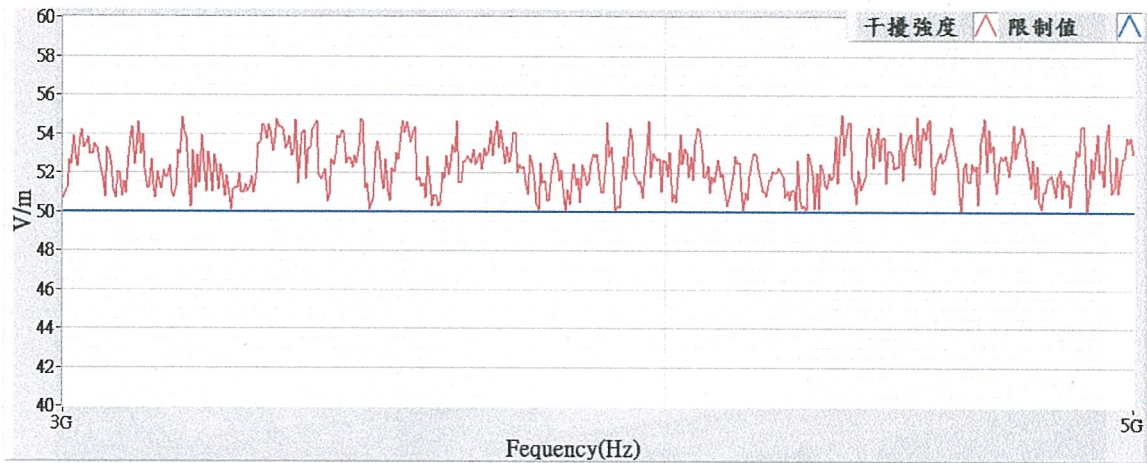

9.2 Photos of Test Setup



RS103 TEST (1)

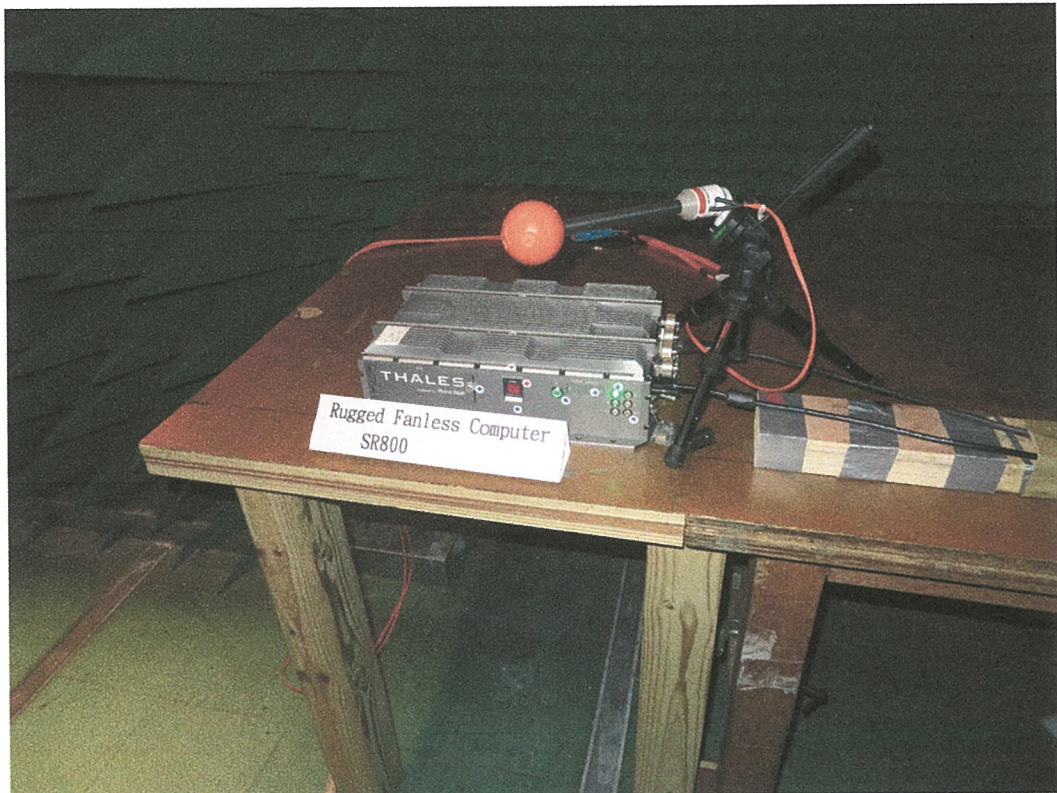

RS103 TEST (2)



RS103 TEST (3)




RS103 TEST (4)



EUT (1)




EUT (2)

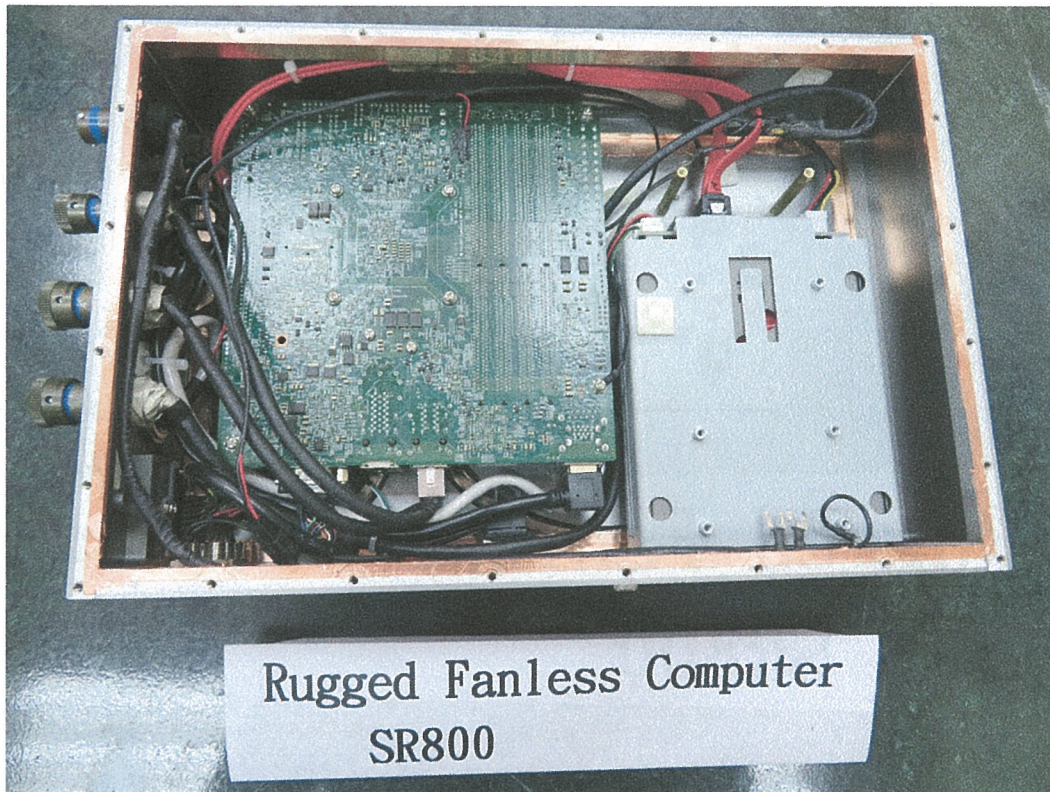

Rugged Fanless Computer
SR800

EUT (3)

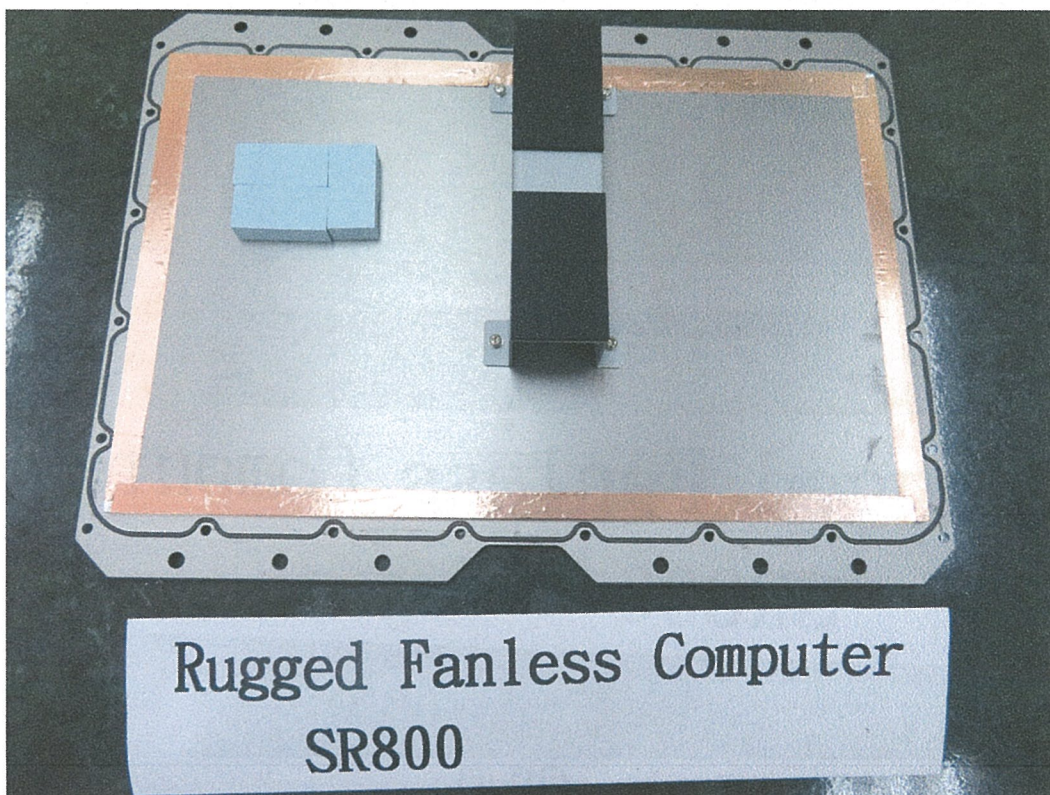


Rugged Fanless Computer
SR800

EUT (4)




Rugged Fanless Computer
SR800

EUT (5)

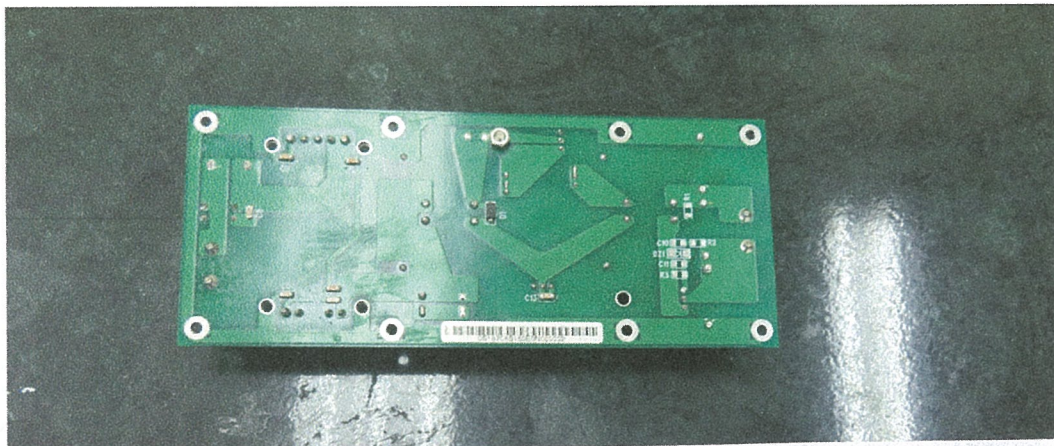

Rugged Fanless Computer
SR800

EUT (6)

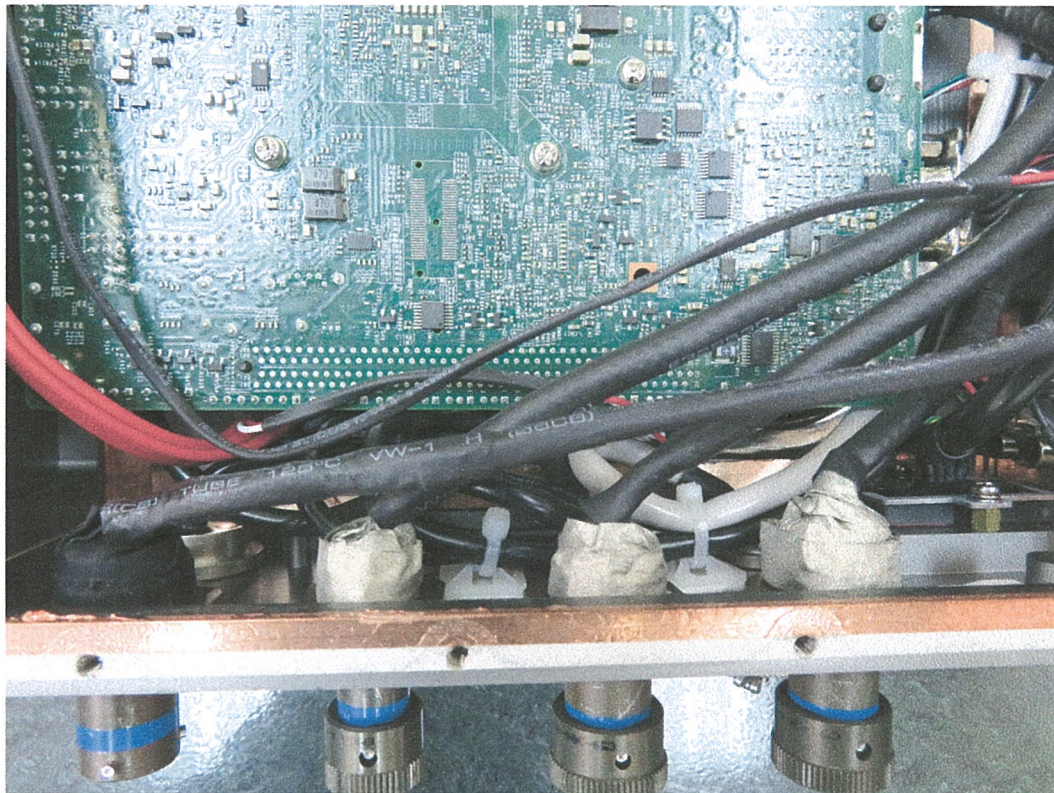

EUT (7)