



LAND



SEA



AIR

ROC280-MG

19"1U Short Depth Military Fanless Server



- 1U Short Depth (400mm) Rugged Workstation
- MIL-STD-810 Thermal, Shock, Vibration, Humidity
- Intel® 13th /14th Core-i® i7-13700TE Processor
- DDR5 64GB, 2x LAN ,2 x DP, 2 x HDMI, 4 x USB Ports
- 12V~40V DC-IN
- Removable Rugged 2 x SSD Cage
- Hardware Secure Erase (AES Key by Options)
- Extended Temperature -20 to +60°C
- MIL-STD-461/1275 Compliance





Specifications

System	
High Performance Processor	Intel® 13 th /14 th Core-i® Processor i7-13700TE (Frequency 3.6GHz, Turbo Boost Frequency up to 4.8GHz), 16-Core,24 Thread Support, 30MB Smart Cache
Chipset	Q670
Memory type	DDR5 5200 MHz / 2 x 260-pin SO-DIMM / Max. 64 GB (Non-ECC)
Display	
DP	Resolution up to 4096 x 2304 @60Hz
HDMI	Resolution up to 4096 x 2304 @60Hz
Storage	
Storage Device	2 x 2.5" Solid State Disk (SSD) 2 x SATAIII up to 4TB
Ethernet	
Ethernet	1 x Intel® I226-LM 2.5Giga LAN 2 x Intel® I226-V 2.5Giga LAN
Front I/O	
COM	2 x RS232
Indicator LED	1 x HDD/SSD LED
SSD Cage	Removable Rugged 2 x SSD Cage
Button	1 x Power Switch with Dedicated LED 1 x Secure Erase Button
Rear I/O	
Ethernet	3 x 2.5GbE
DP	2 x DP
HDMI	2 x HDMI
USB	6 x USB3.1
AUDIO	1 x Mic-in ; 1 x Line-out
Power	1 x Rugged Souriau Connector
Power Requirement	
Power Input	DC-IN 12~40V(150W max)

	Option : 12~36V
Operating System	
Operating System	Windows 10/11 64Bit, Linux by option
Physical	
Dimension (W x D x H)	440 x 400 x 44mm
Chassis	SECC
Environmental	
MIL-STD-810 Compliance	<p>Method 507.5, Procedure II (Temperature & Humidity)</p> <p>Method 516.6 Shock-Procedure V Non-Operating (Mechanical Shock)</p> <p>Method 516.6 Shock-Procedure I Operating (Mechanical Shock)</p> <p>Method 514.6 Vibration Category 24/Non-Operating (Category 20 & 24, Vibration)</p> <p>Method 514.6 Vibration Category 20/Operating (Category 20 & 24, Vibration)</p> <p>Method 501.5, Procedure I (Storage/High Temperature)</p> <p>Method 501.5, Procedure II (Operation/High Temperature)</p> <p>Method 502.5, Procedure I (Storage/Low Temperature)</p> <p>Method 502.5, Procedure II (Operation/Low Temperature)</p> <p>Method 503.5, Procedure I (Temperature shock)</p>
EMC Compliance	<p>MIL-STD-461E :</p> <p>CE102 basic curve, 10kHz - 30 MHz</p> <p>RE102-4, (1.5 MHz) -30 MHz - 5 GHz</p> <p>RS103, 1.5 MHz - 5 GHz, 50 V/m equal for all frequencies</p> <p>EN 61000-4-2: Air discharge: 8 kV, Contact discharge: 6kV</p> <p>EN 61000-4-3: 10V/m</p> <p>EN 61000-4-4: Signal and DC-Net: 1 kV</p> <p>EN 61000-4-5: Leads vs. ground potential 1kV, Signal und DC-Net: 0.5 kV</p> <p>CE and FCC</p>
Operating Temperature	-20 to 60°C
Storage Temperature	-40 to 85°C
Relative Humidity	10% to 95%, non-condensing

Appearance

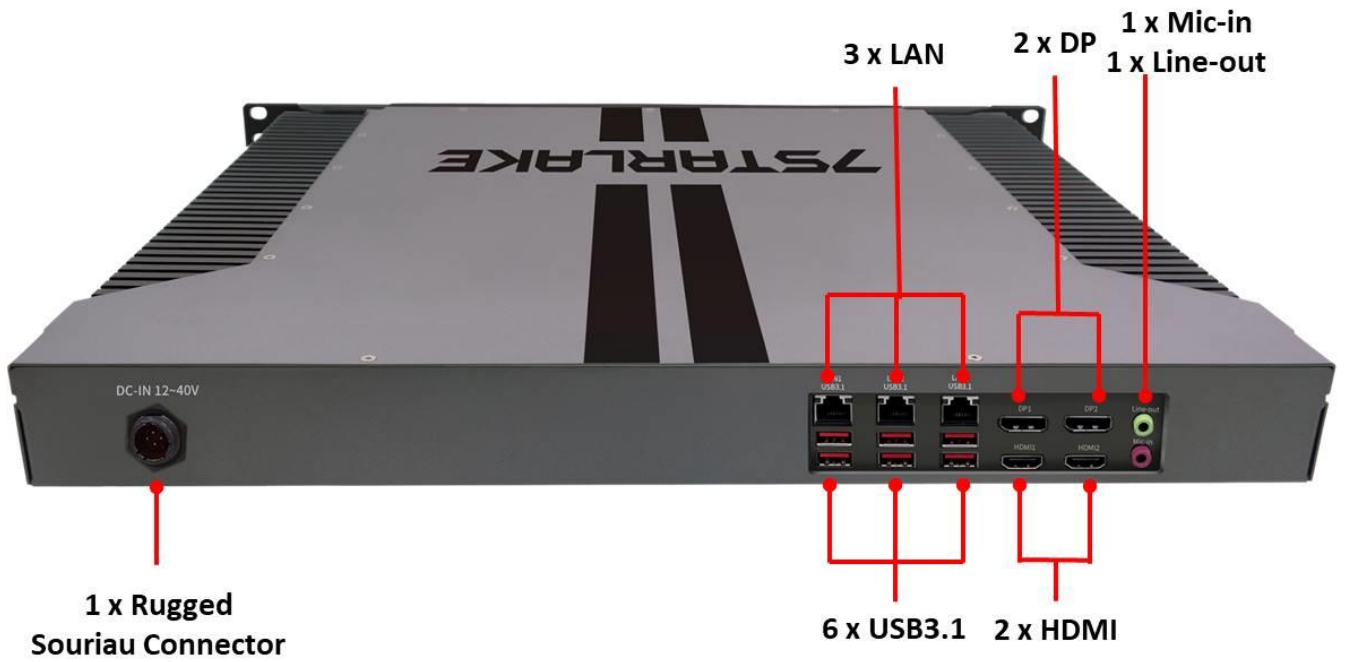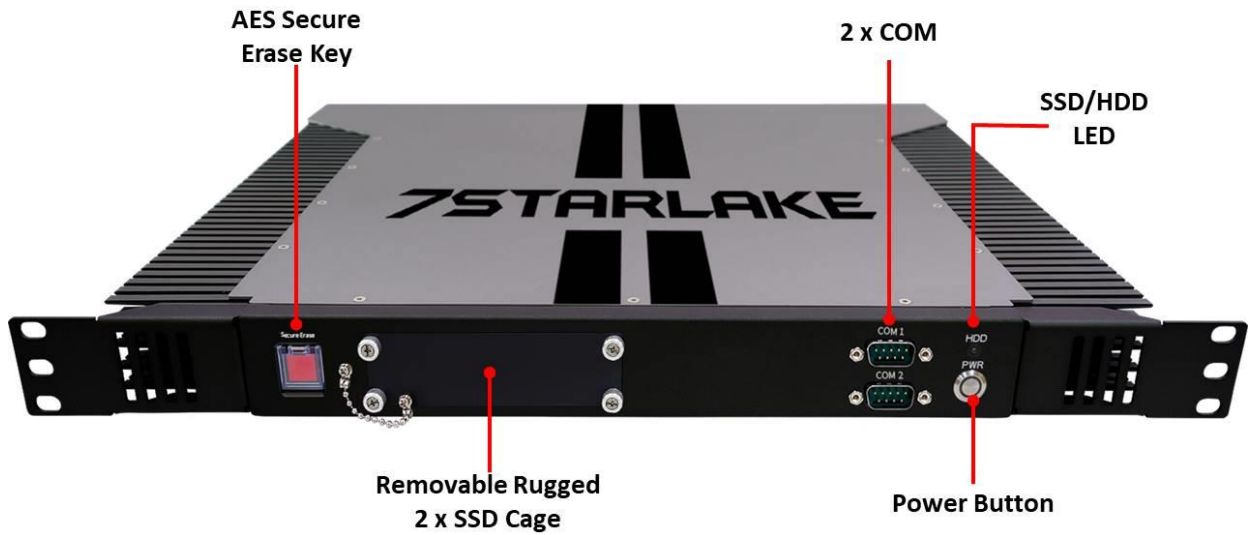

Ordering Information

ROC280-MG

1U 19" Short Depth Military Fanless Server with Intel® Raptor Lake-R/S 14th /13th Processor (Up to 65W), Q670, 2 x DDR5 SO-DIMM up to 64GB, 2 x DisplayPort, 2 x HDMI, 6 x USB, 2 x RS232, 2 x USB2.0, 1 x AES secure erase button, removable rugged 2 x SSD Cage, 12~40V DC-IN rugged souriau connector with MIL-STD-461/1275 compliance, Operating Temp. -20~+60°C